

1 2 3 4 5 6 7 8 9

F

E

D

B

A

F

E

D





C

B



A

NOTES


HOUSING: LCP HIGH-TEMP THERMOPLASTIC, UL94V-0, BEIGE.
TERMINAL: PHOSPHOR BRONZE.
CONNECTOR: BOARD-TO-BOARD PLUG; PITCH 0.80 mm.
HEIGHT: 4.7 mm; STANDARD TYPE; CARRIER REEL.
PLATING: GOLD FLASH; CONTACT AREA: 15 μ m MIN GOLD.
EDOM PART NO.: EBTB08-P47-XXX-G15
XXX = NUMBER OF CONTACTS; SEE DIMENSIONS TABLE.

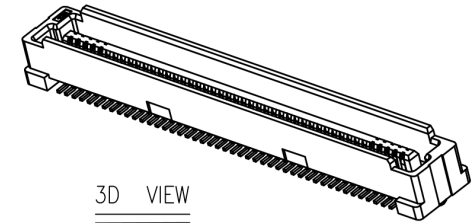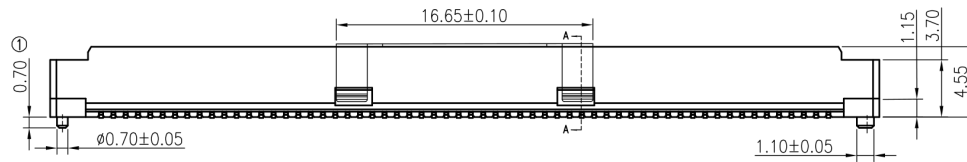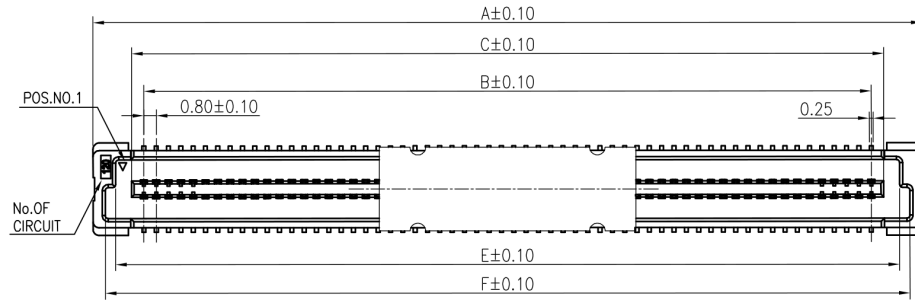

3D VIEW

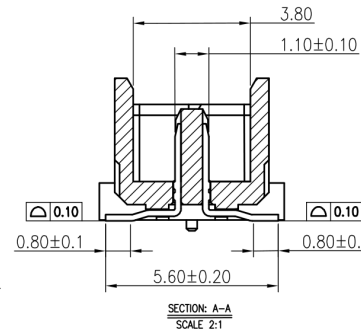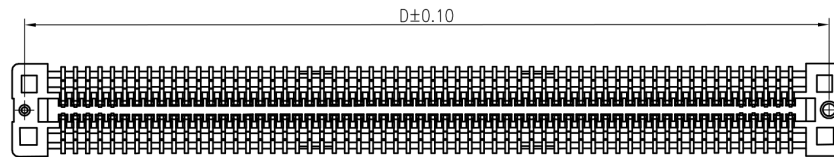

NO. of contacts	Dimensions					
	A	B	C	D	E	F
40	21.80	15.20	16.80	20.20	18.86	20.21
50	25.80	19.20	20.80	24.20	22.86	24.21
60	29.80	23.20	24.80	28.20	26.86	28.21
80	37.80	31.20	32.80	36.20	34.86	36.21
100	45.80	39.20	40.80	44.20	42.86	44.21
120	53.80	47.20	48.80	52.20	50.86	52.21
140	61.80	55.20	46.80	60.20	58.86	60.21
160	69.80	63.20	64.80	68.20	66.86	68.21
180	77.80	71.20	72.80	76.20	74.86	76.21
200	85.80	79.20	80.80	84.20	82.86	84.21

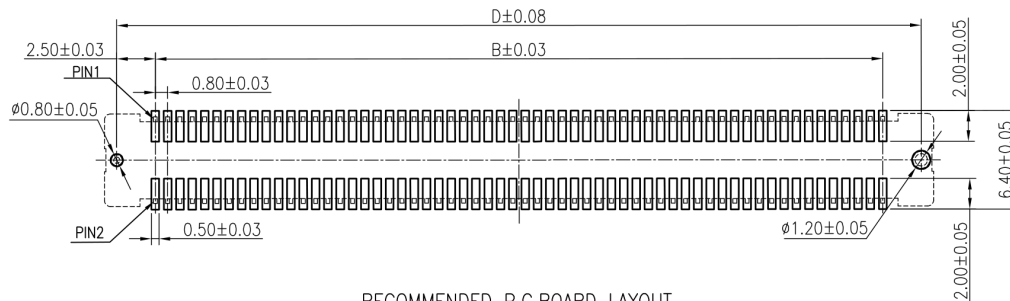

RECOMMENDED P.C.BOARD LAYOUT



TEL: +86 0755 27801940
Mob: +86 15889397634
www.techedom.com

PART NO.	EBTB08-P47-XXX-G15	DRAWN	MARK
DWG NO.	EBTB08-P47-XXX-G15	CHECK	JOHN
TOLERANCE	.X $\pm$ 0.25 .XX $\pm$ 0.20	APPROVE	MELODY
TITLE:	0.8 mm BTB PLUG	REV. A0	
	.XXX $\pm$ 0.10 ANG $\pm$ 1°	SCALE	NTS
		UNIT	mm
		NO	

XXX = contacts: 040, 050, 060, 080, 100, 120, 140, 160, 180 or 200.

1 2 3 4 5 6 7 8 9