


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.		

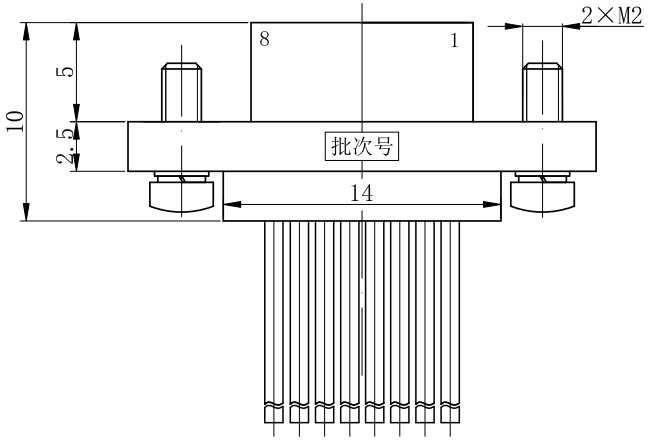

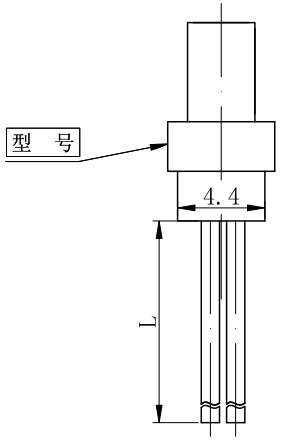

View Without the Locking Assembly

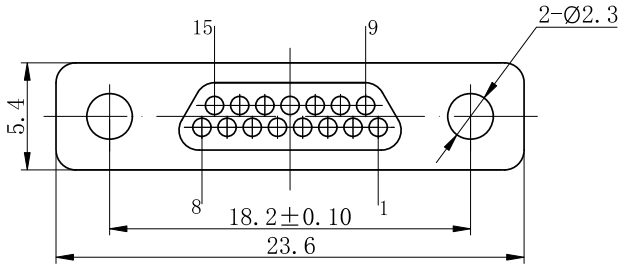

View Without the Locking Assembly

Technical Specifications

1. Operating Temperature: -55°C to +125°C
2. Vibration: 10 Hz–2000 Hz, 196 m/s²
3. Random Vibration: Power Spectral Density (PSD): 0.4 G²/Hz; Overall Acceleration RMS: 23.1 G
4. Shock: 735 m/s², 11 ms
5. Rated Current: 3 A
6. Contact Resistance: < 10 mΩ
7. Insulation Resistance: ≥ 5,000 MΩ
8. Dielectric Withstanding Voltage: 800 V
9. Mechanical Life: 500 cycles

Note: L indicates the wire lead length in millimeters (mm). The actual length shall be determined by the customer's order requirements.

EDOM ELECTRONICS
TEL: +86 0755 27801940
Mob: +86 15889397634
www.techedom.com

PART NO.	DSUBF-1510854		DRAWN	MARK			
DWG NO.			CHECK	JOHN			
TOLERANCE	X.±0.30 .X±0.25		APPROVE	MELODY			
TITLE: D-Sub MIL Spec Connectors 母座15P 带线尾12.7mm	REV. A0	.XX±0.15	SCALE	1:1	UNIT mm	NO	DESCRIPTION