
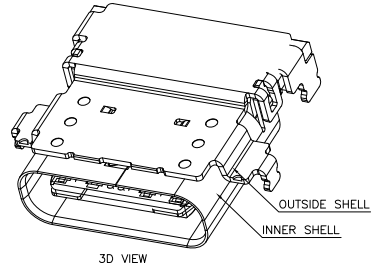
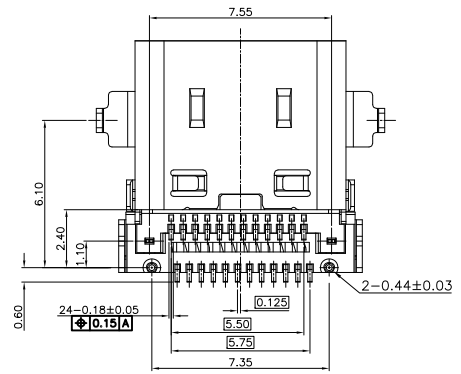
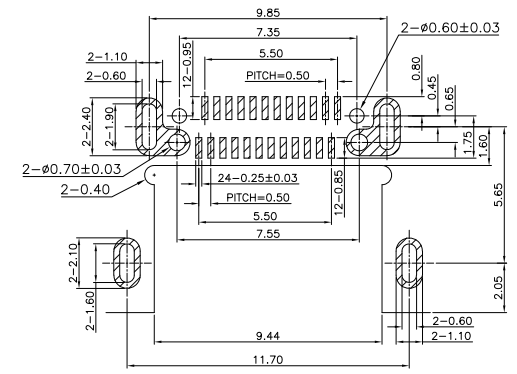

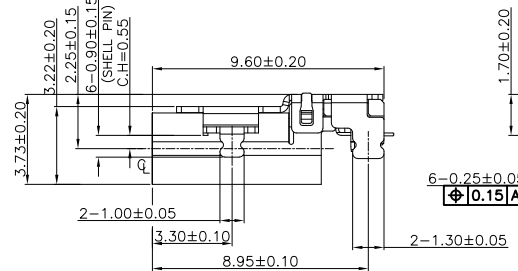
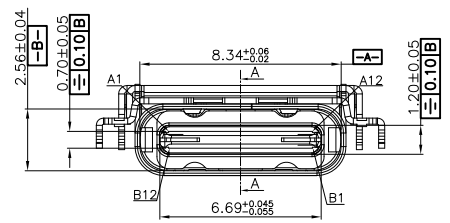
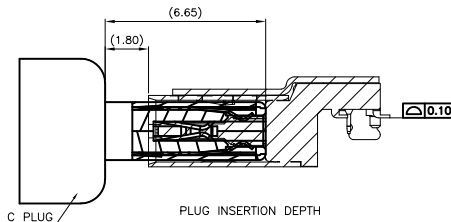





**RoHS Compliant**

REV.	DESCRIPTION	SIGN	DATE
A	NEW	RuoBiaoLing	2020/11/10

**NOTES:**

- MATERIAL:**
  - OUTSIDE SHELL: SUS301R-1/2H T=0.25mm
  - INNER SHELL: SUS301R-1/2H T=0.20mm
  - SIGNAL: SUS301R-H T=0.15mm
  - RFI PAD: SUS304 T=0.08mm
  - HOUSING: PA9T+45%G.F. UL94V-0 BLACK
  - TERMINAL: C19400 T=0.12mm
- PLATING:**
  - TERMINAL: SEE PIN
  - SHELL: NICKEL PLATED 60u"MIN.
- ELECTRICAL CHARACTERISTICS:**
  - CURRENT RATING: 3.0 A  
VOLTAGE RATING: 5.0 V
  - LLCR: VBUS& GND PINS: 40mΩ/PIN MAX  
OTHER PINS : 40mΩ/PIN MAX  
LLCR MAX. CHANGE OF ALL PINS: 10mΩ
  - INSULATION RESISTANCE: 100MΩ MIN.
- MECHANICAL CHARACTERISTICS:**
  - INSERTION FORCE: 0.5~2.0kg.
  - WITHDRAWAL FORCE: 0.8~2.0kg.(INITIAL) 0.6~2.0kg.(AFTER LIFE TEST)
  - LIFE TEST: 10000 CYCLES MIN

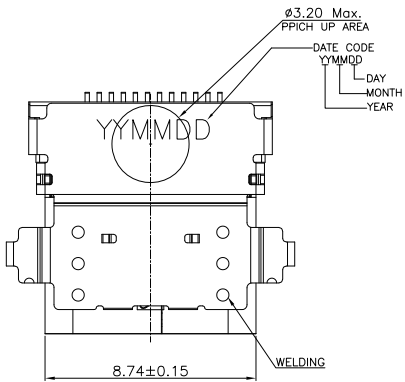

GENERAL TOLERANCES (UNLESS SPECIFIED)			DRAWN BY	DATE	 TEL: +86 0755 27801940 Mob: +86 15889397634 www.techedom.com	
ITEM	MM	INCH	RuoBiaoLing	2020/11/10		
3 PLACE	±0.15	±0.005	CHECKED BY	DATE	<b>TITLE:</b> USB TYPE C FEMALE SMT CH=-0.55 不锈钢外壳镀镍 黑色胶芯 LCP料 端子镀金1U	
2 PLACE	±0.25	±0.01	/	/		
1 PLACE	±0.35	±0.015	APPROVED BY	DATE		
0 PLACE	±0.50	±0.02	Fred.Tong	2020/11/10		
ANGULAR ± 3°			ANGLE OF PROJECTION		SIZE	PART NO.
METRIC		U.S.			A4	EU24F2B3N11385SR
MM		INCHES			SCALE	N/A

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO EDOM INCORPORATED AND SHOULD NOT BE USE WITHOUT WRITTEN PERMISSION

REV. A