
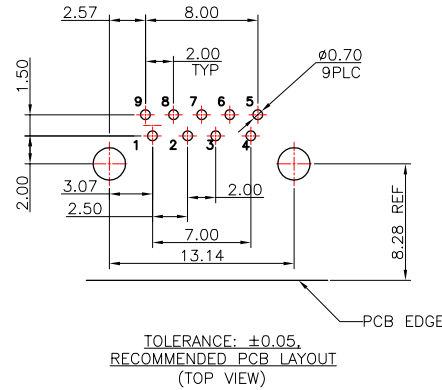


RoHS Compliant

REV.	DESCRIPTION	SIGN	DATE
A	NEW	Fred.Tong	17/06/20

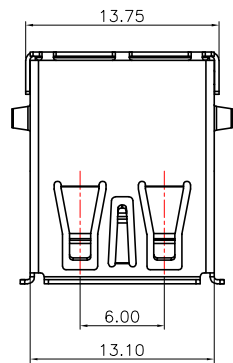

NOTES:

1.ELECTRONIC:





CONTACT CURRENT RATING:1.5A
 CONTACT RESISTANCE: 30mohm MAX
 INSULATION RESISTANCE: 1000 Mohm MIN
 WITHSTAND VOLTAGE:AC 500V,1min.

2.MECHANICAL:

MATING FORCE:3.57KG MAX
 UNMATED FORCE:1.02KG MIN



3.ENVIRONMENT CHARACTERISTICS:

OPERATING TEMPERATURE:-55°C TO +105°C

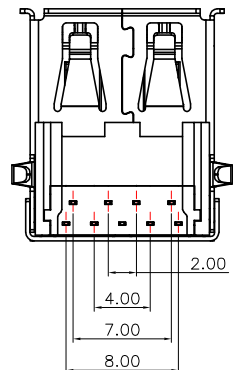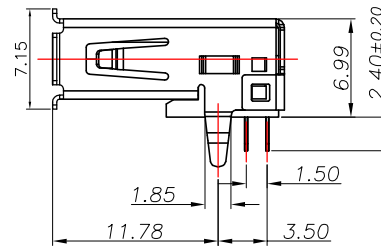

4.MATERIAL LIST:

No.	PART NAME	QTY	MATERIAL	REMARK
3	SHELL	1	SPCC/BRASS	NI PLATED
2	CONTACT	9	COPPER ALLOY	AU /TIN PLATED
1	HOUSING	1	THERMOPLASTIC(PBT)	(UL 94V-0) BLUE

GENERAL TOLERANCES (UNLESS SPECIFIED)			DRAWN BY Alen.Yu	DATE 17/06/20	 TEL: +86 0755 27801940 Mob: +86 15889397634 www.techedom.com	
ITEM	MM	INCH	CHECKED BY Fred.Tong	DATE 17/06/20		
3 PLACE	±0.15	±0.005	APPROVED BY DATE		TITLE: USB3.0 AF R&A DIP H6.99 WITH FLANG	
2 PLACE	±0.25	±0.01	ANGLE OF PROJECTION			
1 PLACE	±0.35	±0.015			SIZE A4	PART NO. EU09FL2N12182
0 PLACE	±0.50	±0.02			SCALE N/A	SHEET 1 OF 1
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO EDOM INCORPORATED AND SHOULD NOT BE USE WITHOUT WRITTEN PERMISSION					REV. A	