

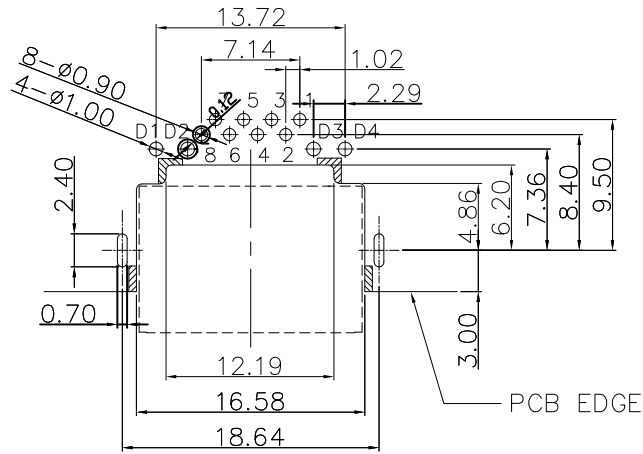
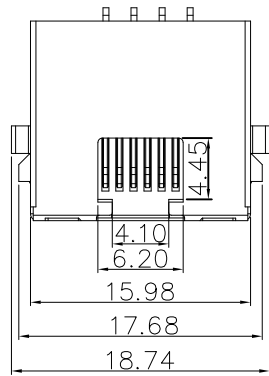
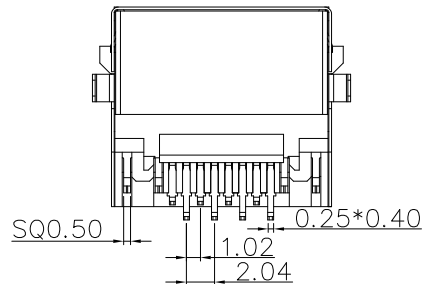
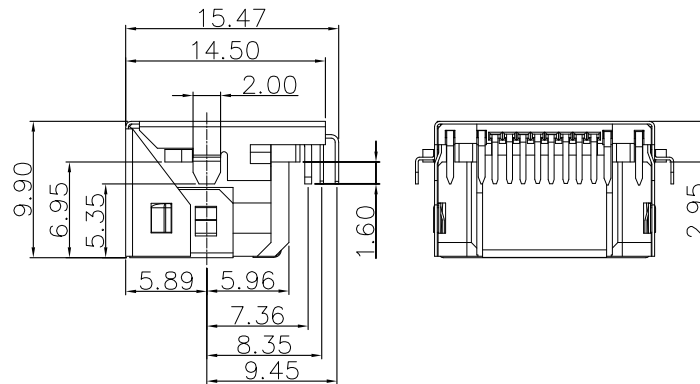


RoHS Compliant

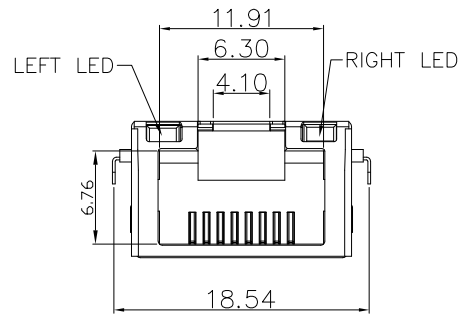

W/LED RECOMMENDED PCB LAYOUT
COMPONENT SIDE(t=1.6mm, tol:±0.05)



NOTE:

1.ELECTRICAL CHARACTERISTICS;



- 1.1 VOLTAGE RATING:125 VAC RMS
- 1.2 CURRENT TATING:1.5AMP
- 1.3 CONTACT RESISTANCE:30 MILLIOHMS MAX
- 1.4 INSULATION RESISTANCE:1000 MEGOHMS MIN
- 1.5 DIELECTRIC STRENGTH:1000V AC RMS 50Hz.1MIN

2 ENVIRONMENTAL:

- 2.1 TEMPERATURE RANGE:-40°C+85°C
- 2.2 RELATIVE HUMIDITYU:90-95%(40±2°C)

3.MATERIAL LIST:

3	SHELL	1	COPPER ALLOY	NI PLATED
2	CONTACT	8	PHOSPHOR BRONZE	AU/SN PLATED
1	HOUSING	1	THERMOPLASTIC	(UL 94V-0) BLACK
No.	PART NAME	QTY	MATERIAL	REMARK

GENERAL TOLERANCES (UNLESS SPECIFIED)			DRAWN BY Alen.Yu		DATE 17/06/26				TEL: +86 0755 27801940 Mob: +86 15889397634 www.techedom.com				
ITEM	MM	INCH	CHECKED BY	DATE		TITLE: RJ45 8P8C DIP RIGHT ANGLE H2.95 WITH LED							
3 PLACE	±0.15	±0.005	Liang.Li	17/06/26									
2 PLACE	±0.25	±0.01	APPROVED BY	DATE									
1 PLACE	±0.35	±0.015	Fred.Tong	17/06/26									
0 PLACE	±0.50	±0.02			ANGLE OF PROJECTION		SIZE A4		PART NO. ERJ08FB1N1232				
ANGULAR ± 3°							SCALE		N/A		SHEEL 1 OF 1		
METRIC													
MM													
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO EDOM INCORPORATED AND SHOULD NOT BE USE WITHOUT WRITTEN PERMISSION												REV. A	