

1 2 3 4 5 6 7 8 9

REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.		

Remarks:

1. Product specifications:

1-1. Insertion force: 35N MAX.

1-2. Pullout force: 10N MIN. INITIAL 8-20N AFTER.

1-3. Rated current: 1.0A.

1-4. Rated voltage: 30V.

1-5. Durability: 10000 CYCLES MIN.

1-6. Withstand voltage: 100V AC MIN.

1-7. Contact impedance: 30m 2 MAX. INITIAL;40m MAX. AFTER.

1-8. Insulation resistance: 100MQ MIN.

1-9. Operating temperature:-30 °I0 + 80 °.



2. Material:

2. 1 rubber core: LCP UL94V-0.

Terminal: C2680R-H, nickel base, gold plated 1 μ.1 "

2.3 Shell: SUS201/301, surface foggy tin / nickel plating.

3. Key size identification "priority" symbol

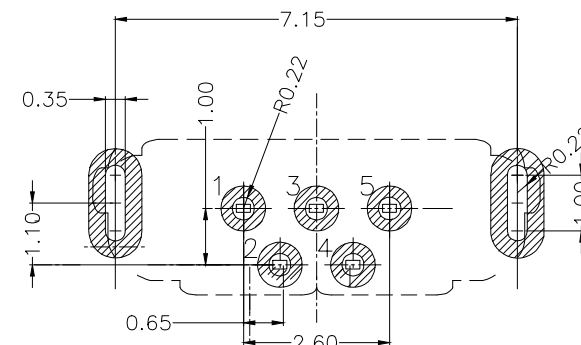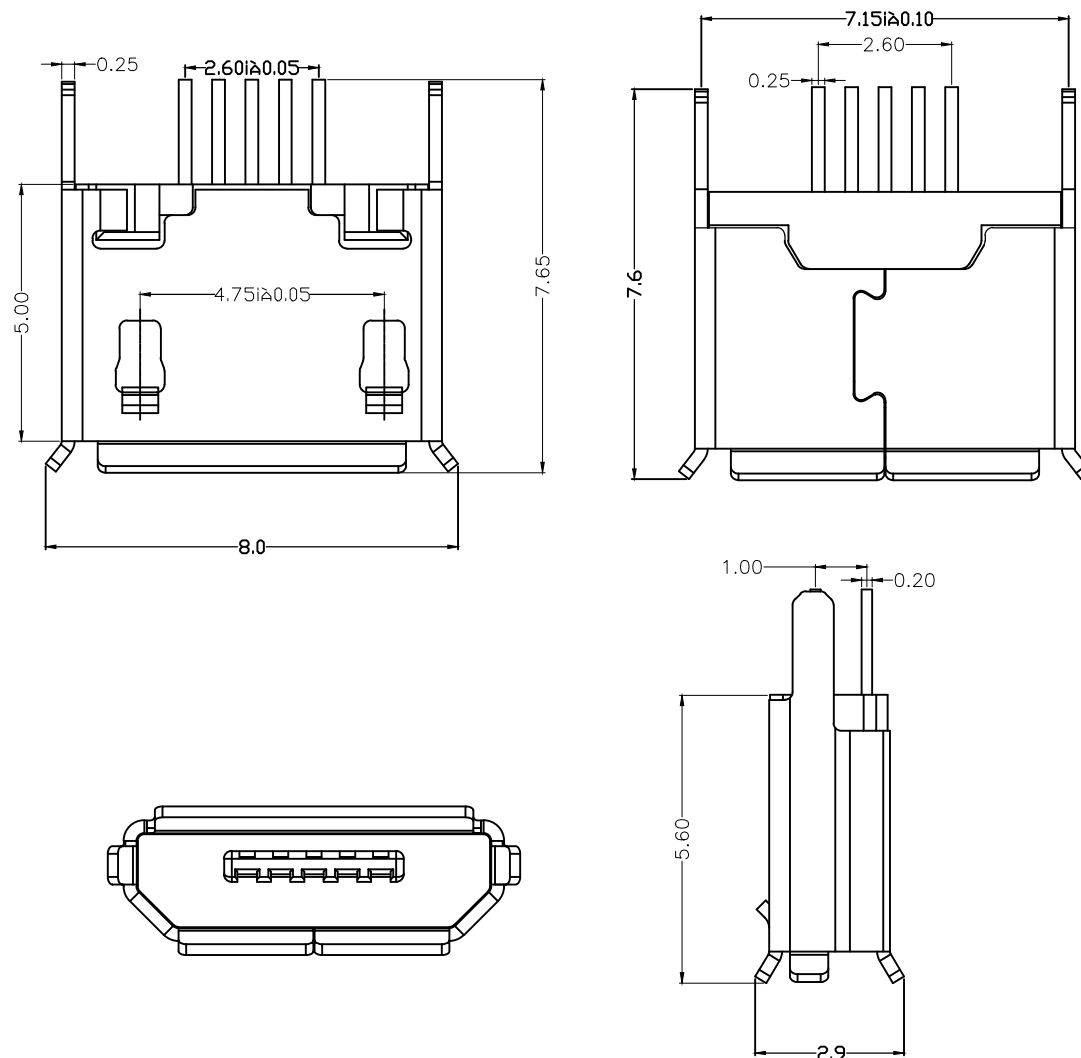

RECOMMENDED P.C.B LAYOUT



TEL: +86 0755 27801940
Mob: +86 15889397634
www.techedom.com

PART NO.	MUSB-BF560-021	DRAWN	MARK
DWG NO.		CHECK	JOHN
TOLERANCE	X.±0.30 .X±0.25	APPROVE	MELODY
TITLE:	REV. A0	.XX±0.15 .XXX±0.10	SCALE 1:1 UNIT mm NO

MICRO USB 5PIN-F立式180度直插DIP有卷边脚长2.0

DESCRIPTION

1 2 3 4 5 6 7 8 9