


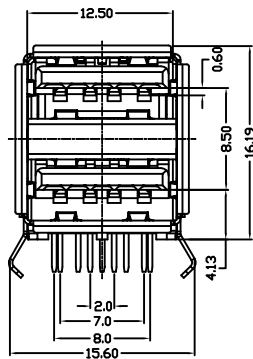
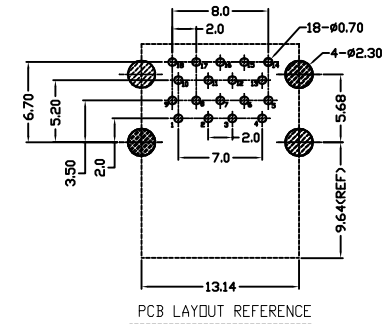



RoHS Compliant

REV.	DESCRIPTION	SIGN	DATE
A	NEW	QinYu	20/07/01



DATE
1112
表示12月
表示2011年

NOTES:

1.ELECTRONIC:

CONTACT RESISTANCE: 30mohm MAX
INSULATION RESISTANCE: 1000 Mohm MIN
WITHSTAND VOLTAGE:AC 500V,1min.

2.MECHANICAL:

DURABILITY: 1500 CYCLE.

3.ENVIRONMENT CHARACTERISTICS:


OPERING TEMPERATURE:-55°C TO +105°C



4.RECOMMANDER PCB THICKNESS 1.2 TO 1.60MM

No.	PART NAME	QTY	MATERIAL	REMARK
5	SHELL	1	BARESS/SPCC	NI PLATED
4	SPIN	5	COPPER ALLOY	G/F AU/TIN PLATED
3	4PIN	4	COPPER ALLOY	G/F AU/TIN PLATED
2	COVER	1	THERMOPLASTIC (PBT)	(UL94V-0) BLUE(300C)
1	HOUSING	1	THERMOPLASTIC (PBT)	(UL94V-0) BLUE(300C)

USB 3.0 PIN ASSIGNMENTS

Pin #	SIGNAL NAME	DESCRIPTION
1	VBUS	POWER
2	D-	USB 2.0 DIFFERENTIAL PAIR
3	D+	DIFFERENTIAL PAIR
4	GND	GROUND FOR POWER RETURN
5	StdA_SSRX-	SUPERSPEED RECEIVER DIFFERENTIAL PAIR
6	StdA_SSRX+	DIFFERENTIAL PAIR
7	GND_DRAIN	GROUND FOR SIGNAL RETURN
8	StdA_SSTX-	SUPERSPEED TRANSMITTER DIFFERENTIAL PAIR
9	StdA_SSTX+	DIFFERENTIAL PAIR
Shell	Shield	CONNECTOR METAL SHELL



GENERAL TOLERANCES (UNLESS SPECIFIED)		DRAWN BY	DATE	 TEL: +86 0755 27801940 Mob: +86 15889397634 www.techedom.com
ITEM	MM	INCH	DATE	
3 PLACE	±0.15	±0.005	20/07/01	
2 PLACE	±0.25	±0.01	20/07/01	
1 PLACE	±0.35	±0.015	20/07/01	
0 PLACE	±0.50	±0.02	20/07/01	
ANGULAR ± 2°		ANGLE OF PROJECTION		TITLE: 双层 USB3.0 A/T FEMALE 90度DIP 无弹片蓝胶芯
METRIC	U.S.			
MM	+NGHES			
		SIZE	PART NO.	SHEEL 1 OF 1
		A4	EU18FL1N1234	

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO EDOM INCORPORATED AND SHOULD NOT BE USE WITHOUT WRITTEN PERMISSION

REV. A