

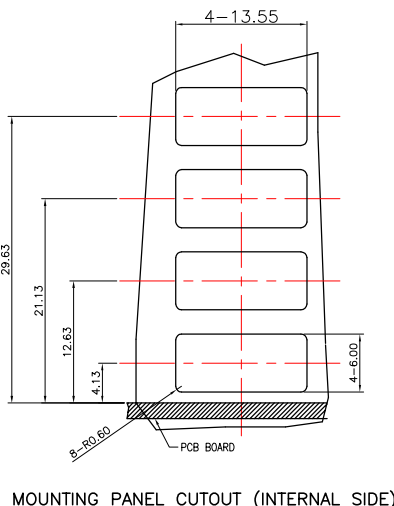
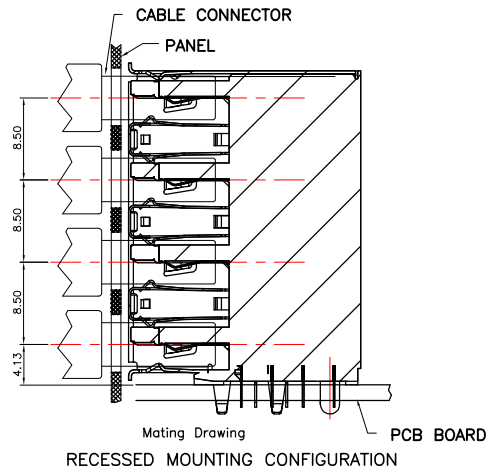

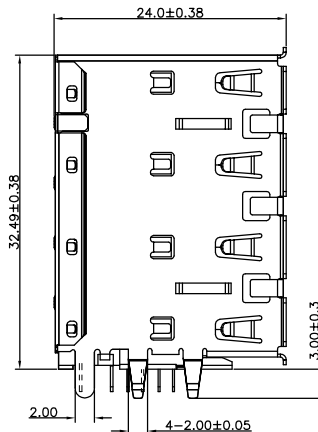
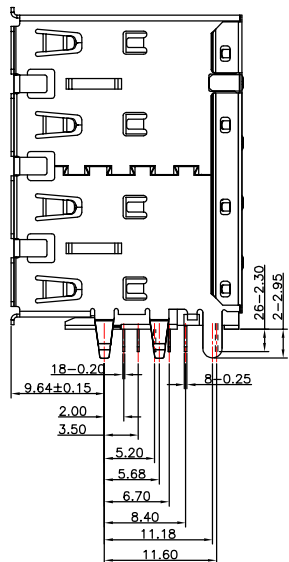


RoHS Compliant

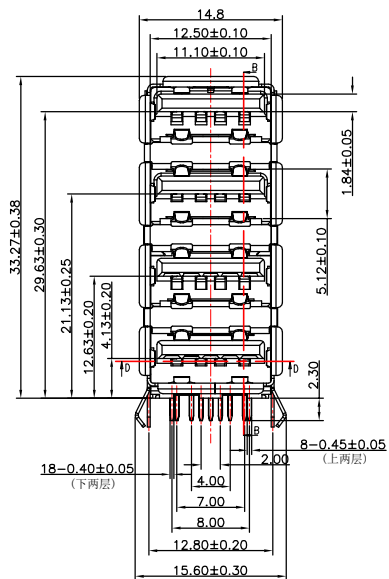

REV.	DESCRIPTION	SIGN	DATE
A	NEW	Fred.Tong	16/06/18

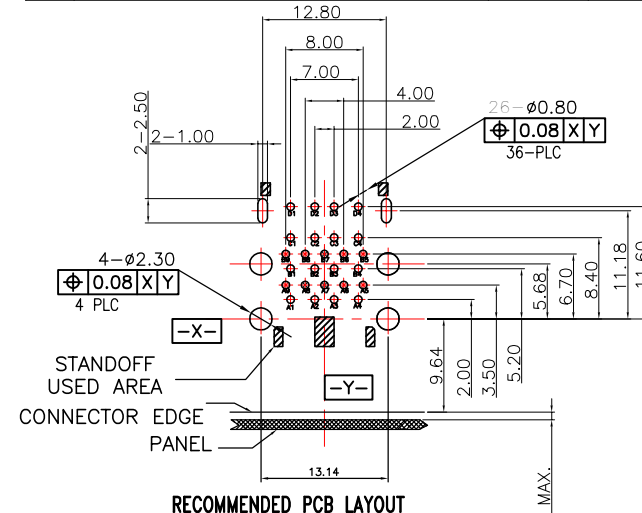

NOTES:

- ELECTRONIC:
 - CONTACT RESISTANCE: 30mohm MAX
 - INSULATION RESISTANCE: 1000 Mohm MIN
 - WITHSTAND VOLTAGE: AC 500V, 1min.
- MECHANICAL:
 - DURABILITY: 1500 CYCLE.
- ENVIRONMENT CHARACTERISTICS:
 - OPERING TEMPERATURE: -55°C TO +105°C
- RECOMMENDER PCB THICKNESS 1.2 TO 1.60MM
- MATERIAL LIST:

NO.	PLATING VIGHT(ng)	Q'TY.	MATERIAL	TREATMENT
9		1	LCP	UL 94V-0, COLOR BLACK
8		1	LCP	UL 94V-0, COLOR BLACK
7		1	HTN	UL 94V-0, COLOR BLACK
6		1	HTN	UL 94V-0, COLOR BLACK
5		10	C2680	1u" Au PLATED ON CONTACT AREA, 80u" Min TINMATTED PLATED ON SOLDER AREA, 50u" Min NI UNDERPLATING OVER ALL
4		16	CS191	
3		3	SUS	CLEAN
2		1	SUS	CLEAN
1		1	SUS	Tin PLATING ONLY AT KINKS AND PLATING AT THE OTHER ARE

GENERAL TOLERANCES (UNLESS SPECIFIED)		DRAWN BY: Alen.Yu		DATE: 16/06/18		TEL: +86 0755 27801940 Mob: +86 15889397634 www.techedom.com	
ITEM	MM	INCH	CHECKED BY: Liang.Li	DATE: 16/06/18			
3 PLACE	±0.15	±0.005	APPROVED BY: Fred.Tong		DATE: 16/06/18		TITLE: USB 四层 USB3.0x2下, USB 2.0x2上 DIP
2 PLACE	±0.25	±0.01	ANGLE OF PROJECTION		SIZE: A4		PART NO.: EU26FB3N12236
1 PLACE	±0.35	±0.015			SCALE: N/A		SHEET 1 OF 1
0 PLACE	±0.50	±0.02					

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO EDOM INCORPORATED AND SHOULD NOT BE USE WITHOUT WRITTEN PERMISSION

REV. A