
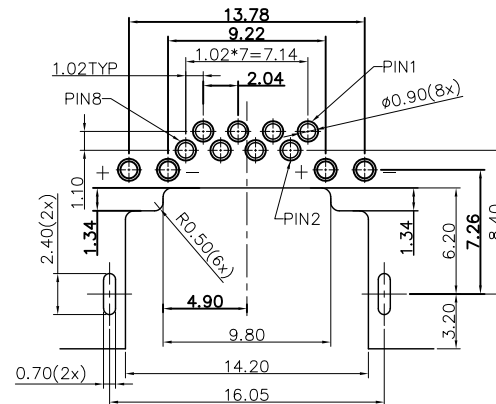




RoHS Compliant

REV.	DESCRIPTION	SIGN	DATE
A	NEW	RuoBiaoLiang	2020/12/18



RECOMMENDED PCB LAYOUT

TOLERANCE ± 0.05

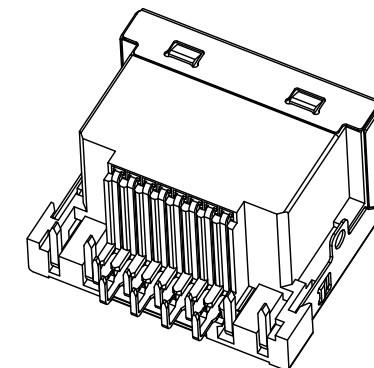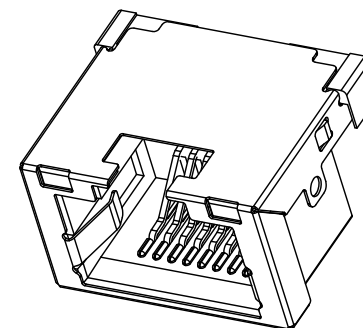

NOTE:

1.ELECTRICAL CHARACTERISTICS;


- 1.1 VOLTAGE RATING: 125 VAC RMS
- 1.2 CURRENT TATING: 1.5AMP
- 1.3 CONTACT RESISTANCE: 30 MILLIOHMS MAX
- 1.4 INSULATION RESISTANCE: 1000 MEGOHMS MIN
- 1.5 DIELECTRIC STRENGTH: 1000V AC RMS 50Hz.1MIN

2 ENVIRONMENTAL:

- 2.1 TEMPERATURE RANGE: -40°C $+85^{\circ}\text{C}$
- 2.2 RELATIVE HUMIDITYU: 90 95%($40\pm 2^{\circ}\text{C}$)

MATERIAL LIST:

3	SHELL	1	STAINLESS STEEL	NI PLATED
2	CONTACT	8	PHOSPHOR BRONZE	AU/SN PLATED
1	HOUSING	1	THERMOPLASTIC	(UL 94V-0)
No.	PART NAME	QTY	MATERIAL	REMARK

GENERAL TOLERANCES (UNLESS SPECIFIED)			DRAWN BY RuoBiaoLiang		DATE 2020/12/18		 TEL: +86 0755 27801940 Mob: +86 15889397634 www.techedom.com			
ITEM	MM	INCH	CHECKED BY		DATE					
3 PLACE	±0.15	±0.005	/							
2 PLACE	±0.25	±0.01	APPROVED BY		DATE		TITLE: RJ45 8P FEMALE 沉板H2.95 DIP 带灯			
1 PLACE	±0.35	±0.015								
0 PLACE	±0.50	±0.02	ANGULAR ± 3°						SIZE A4	
METRIC		U.S.								
MM		INCHES								
							PART NO. BRJF085B1N1298SR			
							SCALE		N/A	SHEEL 1 OF 1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO EDOM
INCORPORATED AND SHOULD NOT BE USE WITHOUT WRITTEN PERMISSION

REV.
A

