

RoHS Compliant

REV.	DESCRIPTION	SIGN	DATE
A	NEW	Fred.Tong	2019/07/08

NOTE:

1.ELECTRICAL CHARACTERISTICS;

1.1 VOLTAGE RATING: 125 VAC RMS

1.2 CURRENT TATING: 1.5AMP

1.3 CONTACT RESISTANCE: 30 MILLIOHMS MAX

1.4 INSULATION RESISTANCE: 1000 MEGOHMS MIN

1.5 DIELECTRIC STRENGTH: 1000V AC RMS 50Hz.1MIN


2 ENVIRONMENTAL:

2.1 TEMPERATURE RANGE: -40°C +85°C

2.2 RELATIVE HUMIDITYU: 90 95%(40±2°C)








MATERIAL LIST:

3	SHELL	1	STAINLESS STEEL	NICKEL PLATED
2	CONTACT	8	PHOSPHOR BRONZE	AU/SN PLATED
1	HOUSING	1	THERMOPLASTIC	(UL94V-0) BLACK
No.	PART NAME	QTY	MATERIAL	REMARK

GENERAL TOLERANCES (UNLESS SPECIFIED)			DRAWN BY Alen.Yu		DATE 2019/07/08		 TEL: +86 0755 27801940 Mob: +86 15889397634 www.techedom.com				
ITEM	MM	INCH	CHECKED BY		DATE /						
3 PLACE	±0.15	±0.005	APPROVED BY Fred.Tong		DATE 2019/07/08		TITLE: RJ45 8P FEMALE 沉板H4.30 DIP 带灯				
2 PLACE	±0.25	±0.01									
1 PLACE	±0.35	±0.015									
0 PLACE	±0.50	±0.02									
ANGULAR ± 3°			ANGLE OF PROJECTION				SIZE A4		PART NO. ERJ08FB3N1269		
METRIC MM		U.S. INCHES		SCALE			N/A		SHEEL 1 OF 1		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO EDOM
INCORPORATED AND SHOULD NOT BE USE WITHOUT WRITTEN PERMISSION

REV.
A

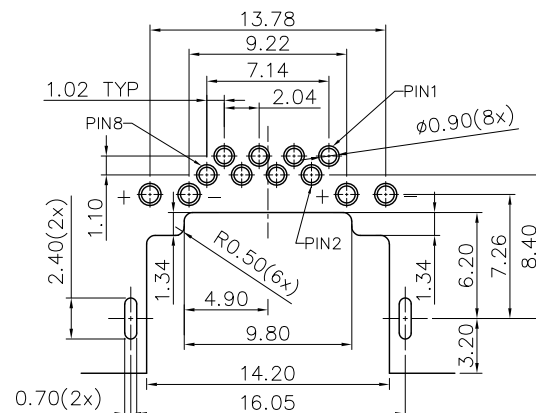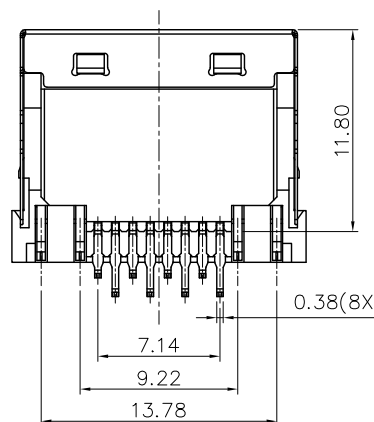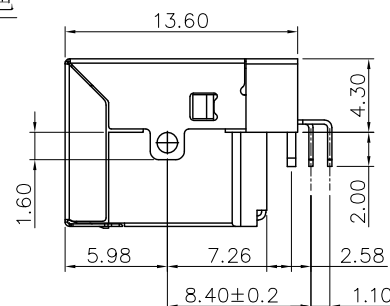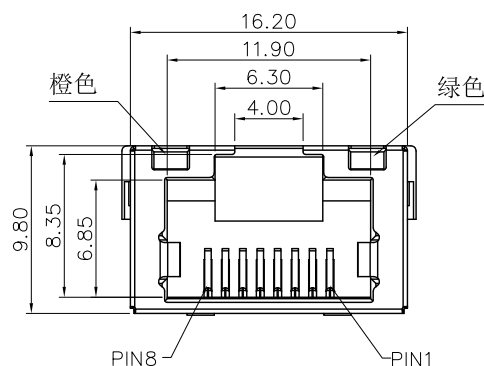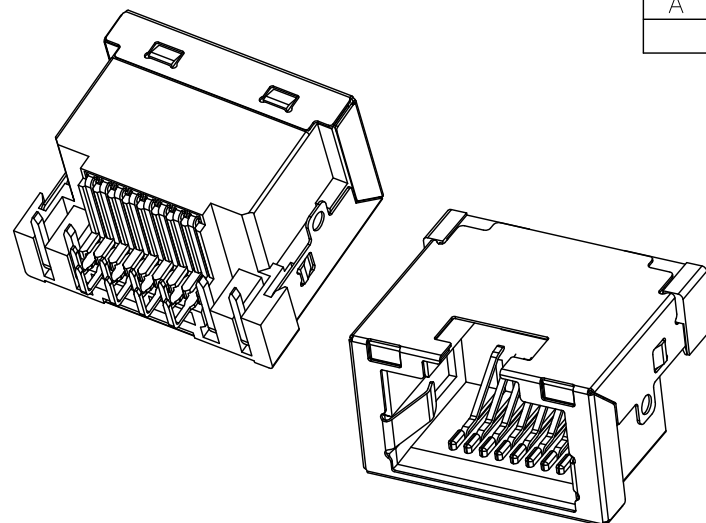

RECOMMENDED PCB LAYOUT

TOLERANCE ±0.05