

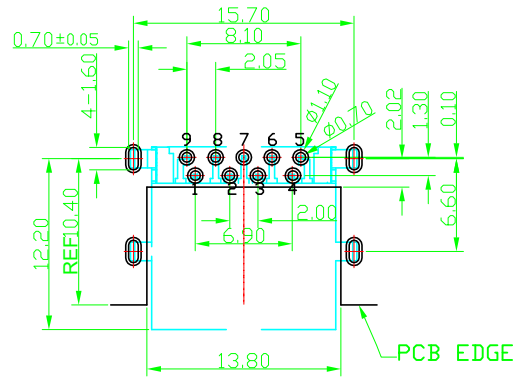
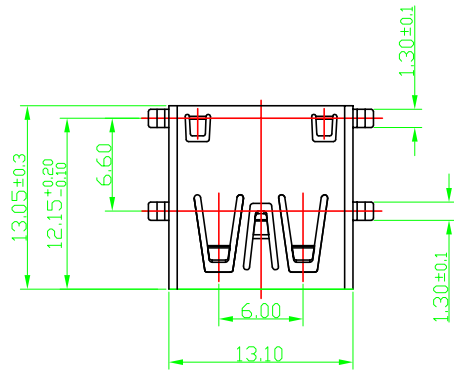



RoHS Compliant

REV.	DESCRIPTION	SIGN	DATE
A	NEW	Fred.Tong	17/06/20

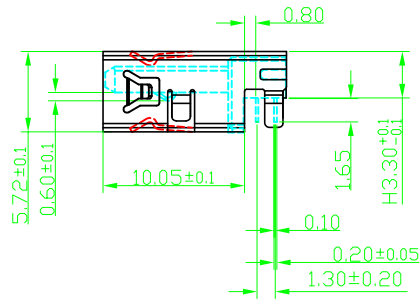

RECOMMENDED PCB LAYOUT  
TOLERANCE: ±0.05

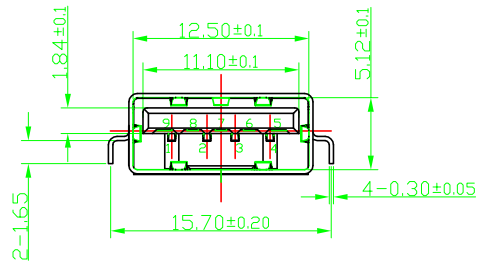


NOTES:

- ELECTRONIC:**  
CONTACT CURRENT RATING:1.5A  
CONTACT RESISTANCE: 30mohm MAX  
INSULATION RESISTANCE: 1000 Mohm MIN  
WITHSTAND VOLTAGE:AC 500V,1min.
- MECHANICAL:**  
MATING FORCE:3.57KG MAX  
UNMATED FORCE:1.02KG MIN
- ENVIRONMENT CHARACTERISTICS:**  
OPERTING TEMPERATURE:-55°C TO +105°C

4.MATERIAL LIST:

No.	PART NAME	QTY	MATERIAL	REMARK
3	SHELL	1	COPPER ALLOY	NI PLATED
2	CONTACT	9	COPPER ALLOY	AU /TIN PLATED
1	HOUSING	1	THERMOPLASTIC(LCP)	(UL 94V-0) BLUE

GENERAL TOLERANCES (UNLESS SPECIFIED)			DRAWN BY	DATE	 TEL: +86 0755 27801940 Mob: +86 15889397634 www.techedom.com		
ITEM	MM	INCH	Alen.Yu	17/06/20			
3 PLACE	±0.15	±0.005	CHECKED BY	DATE	TITLE: <b>USB3.0 AF DIP R&amp;A H3.30</b>		
2 PLACE	±0.25	±0.01	Fred.Tong	17/06/20			
1 PLACE	±0.35	±0.015	APPROVED BY	DATE			
0 PLACE	±0.50	±0.02	ANGULAR ± 3°		SIZE	PART NO. EU09FL1N12164	
METRIC		U.S.		A4			
MM		INCHES		SCALE		N/A	SHEEL 1 OF 1
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO EDOM INCORPORATED AND SHOULD NOT BE USE WITHOUT WRITTEN PERMISSION						REV. A	