


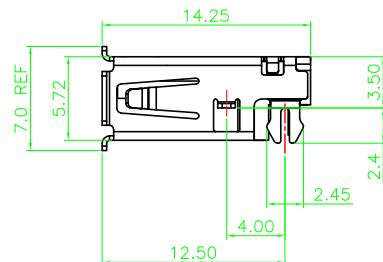

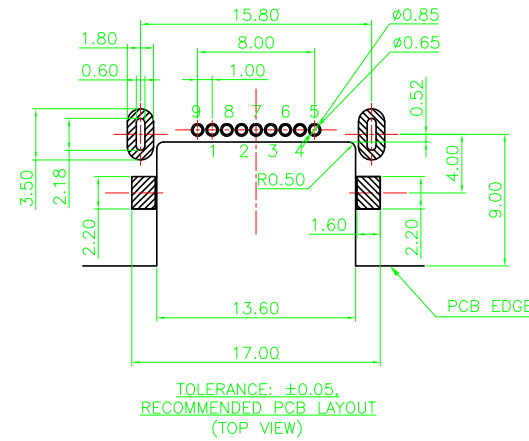


RoHS Compliant

REV.	DESCRIPTION	SIGN	DATE
A	NEW	Fred.Tong	2017/09/15



NOTES:

1.ELECTRONIC:

CONTACT CURRENT RATING:1.5A  
 CONTACT RESISTANCE: 30mohm MAX  
 INSULATION RESISTANCE: 1000 Mohm MIN  
 WITHSTAND VOLTAGE:AC 500V,1min.

2.MECHANICAL:



MATING FORCE:3.57KG MAX  
 UNMATED FORCE:1.02KG MIN

3.ENVIRONMENT CHARACTERISTICS:

OPERTING TEMPERATURE:-55°C TO +105°

4.MATERIAL LIST:

No.	PART NAME	QTY	MATERIAL	REMARK
3	SHELL	1	SPCC/COPPER ALLOY	NI PLATED
2	CONTACT	9	COPPER ALLOY	AU /TIN PLATED
1	HOUSING	1	THERMOPLASTIC(LCP)	(UL 94V-0) BLUE

GENERAL TOLERANCES (UNLESS SPECIFIED)			DRAWN BY RuoBiaoLing DATE 2017/09/15		 TEL: +86 0755 27801940 Mob: +86 15889397634 www.techedom.com
ITEM	MM	INCH	CHECKED BY /	DATE /	
3 PLACE	±0.15	±0.005			TITLE: <b>USB 3.0 AF 沉板H3.50 DIP</b> 外壳鱼叉脚 有卷边 PART NO. EU09FL1N12241
2 PLACE	±0.25	±0.01			
1 PLACE	±0.35	±0.015			
0 PLACE	±0.50	±0.02			
ANGULAR ± 3°			APPROVED BY Fred.Tong DATE 2017/09/15		ANGLE OF PROJECTION
METRIC		U.S.			SIZE A4
MM		INCHES			SCALE N/A
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO EDOM INCORPORATED AND SHOULD NOT BE USE WITHOUT WRITTEN PERMISSION					REV. A