REV	ECN NO	DESCRIPTION	DATE	APPROVED
A	-	NEW RELEASED	2026.06.01	MAY.YU

Customer drawing

RoHS

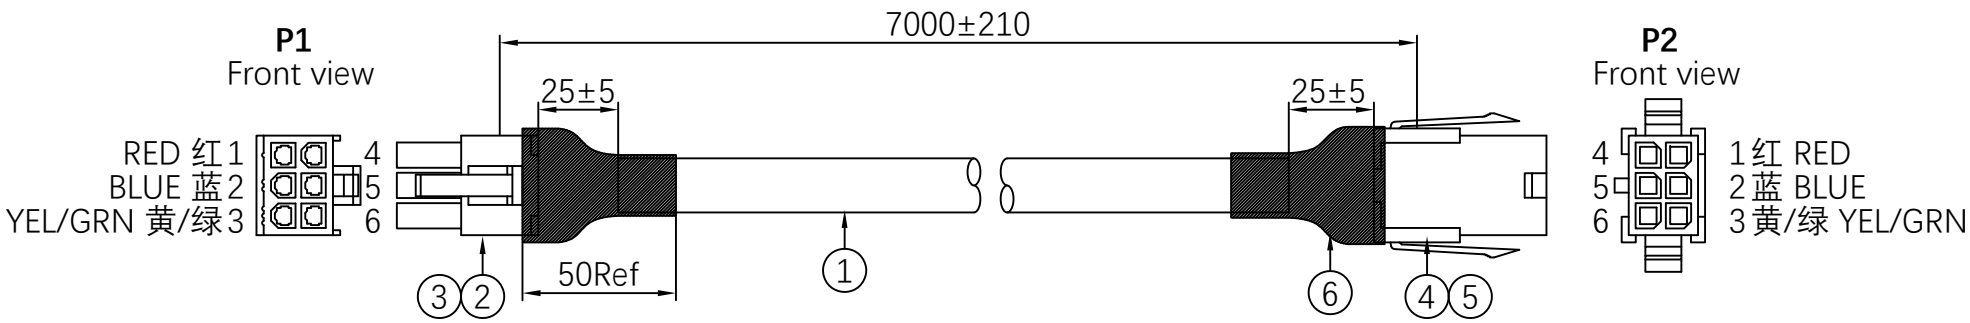

NOTE:
1. Conductor resistance.: 5 Ohms Max.
2. Insulation resistance.: 10M Ohms Min.
3. Voltage.: DC 300V/0.01sec.
4. 100% Test Open、Short & Miswire.
5. 100% finished product inspection and size measurement.
6. Terminal pulling force standard (reference value) UL486A.
7. The assemble comply with IPC/WHMA-A-620E standard.

Pin Assignment

P1		P2
1	红 RED	1
2	蓝 BLUE	2
3	黄/绿 YEL/GRN	3

No.	PART NUMBER	NAME	DESCRIPTION	Q'TY
7	-	PACKING	1PCS/BAG	1
6	-	TUBE	BLACK SHRINK TUBE WITH GLUE OD15.4x50mm	2
5	-	HOUSING	MOLEX 39012061 CONN PLUG HSG 6POS PANEL MNT 4.2mm	1
4	-	TERMINAL	MOLEX 39000040 CONN PIN 18-24AWG CRIMP TIN	3
3	-	HOUSING	MOLEX 39012060 CONN RCPT HSG 6POS 4.2mm	1
2	-	TERMINAL	MOLEX 39000038 CONN SOCKET 18-24AWG CRIMP TIN	3
1	-	WIRE	3*0.75mm² BLACK FLEXIBLE CABLE 105°C 300V	1

TITLE
Power flue High Temp Power Cord

EDOM ELECTRONICS CO.,LTD

CUSTOMER	A002	CUSTOMER PART NO.	420202REV1		
DRAWN BY	MAY.YU	PRODUCT PART NUMBER	A002-00048-01	SIZE A4	REV A
CHECKED BY	BILL.LEE	DRAWING NUMBER	A002-00048		
APPROVED BY	TIGER.WANG	SCALE FREE	ALL DIMENSION UNIT IN MM	SHEET 1 OF 1	