


1			2		3		4		5		Customer drawing	
REV	ECN NO	DESCRIPTION			DATE	APPROVED	RoHS					
A	-	NEW RELEASED			2026.09.08	MAY.YU						

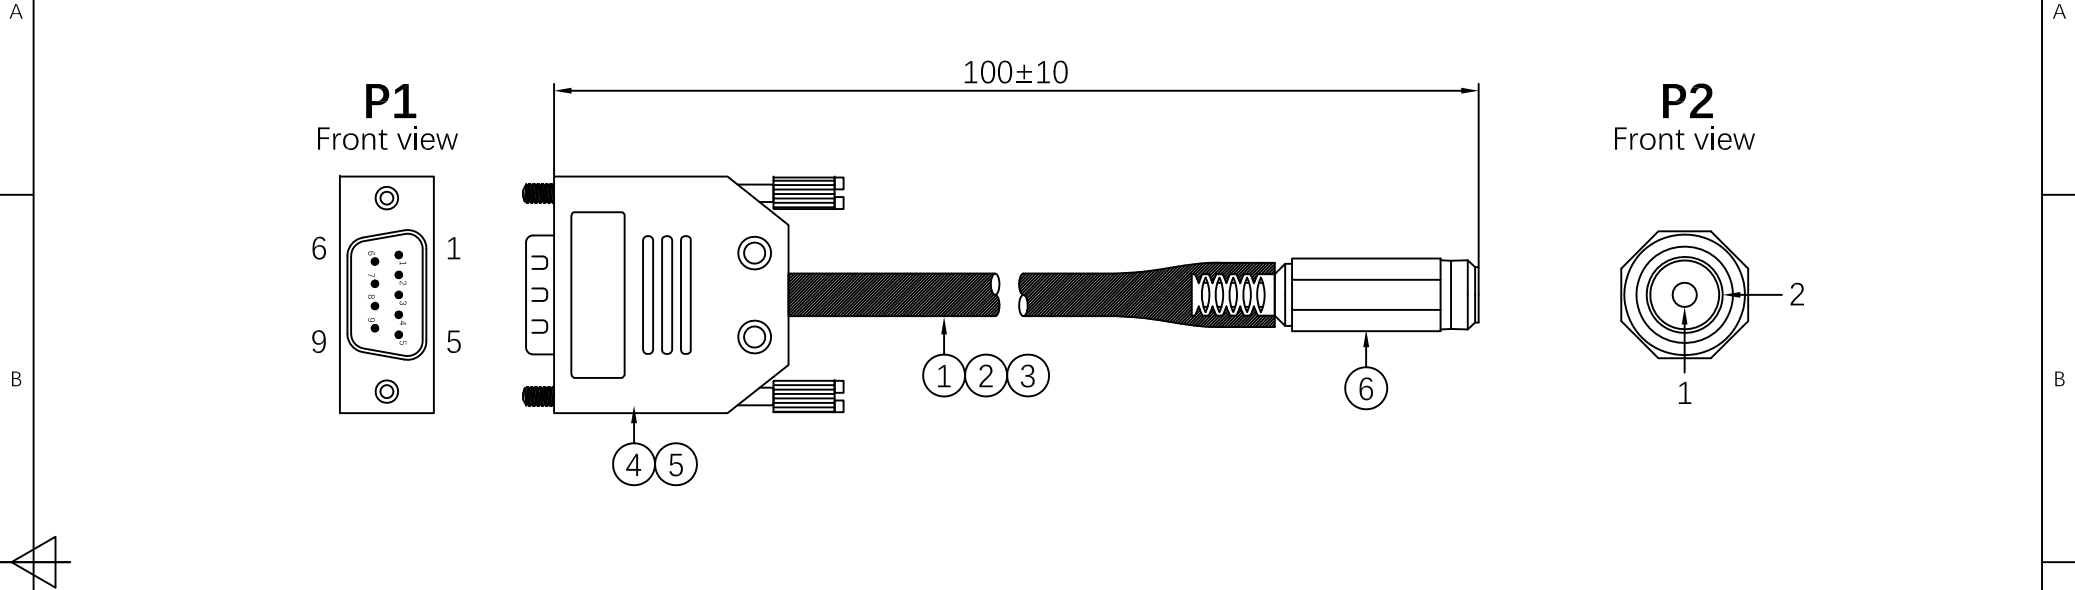

- NOTE:
- 1. Conductor resistance.: 5 Ohms Max.
 - 2. Insulation resistance.: 10M Ohms Min.
 - 3. Voltage.: DC 300V/0.01sec.
 - 4. 100% Test Open、Short & Miswire.
 - 5. 100% finished product inspection and size measurement.
 - 6. Terminal pulling force standard (reference value) UL486A.
 - 7. The assemble comply with IPC/WHMA-A-620E standard.

Pin Assignment

P1		P2	
5	黑 BLACK	2	
6	红 RED	1	

7	-	PACKING	10PCS/PE BAG	1	TITLE RVM.2809.01.01.CABL Power Supply RVMFS		EDOM ELECTRONICS CO.,LTD					
6	-	CONNECTOR	CONN PWR JACK 2.1X5.5mm SOLDER	1								
5	-	BACKSHELL	CONN BACKSHELL 9POS 180DEG BLACK WITH LONG SCREW	1								
4	-	CONNECTOR	DB9P MALE SOLDER PINS BLACK	1								
3	-	TUBE	BLACK SHRINK TUBE Ø6.0x60mm	1	CUSTOMER	A002	CUSTOMER PART NO.	-				
2	-	WIRE	UL1007 18AWG BLACK 80°C 300V	1	DRAWN BY	MAY.YU	PRODUCT PART NUMBER	A002-00053-001		SIZE	REV	
1	-	WIRE	UL1007 18AWG RED 80°C 300V	1	CHECKED BY	BILL.LEE	DRAWING NUMBER	A002-00053		A4	A	
No.	PART NUMBER	NAME	DESCRIPTION	Q'TY	APPROVED BY	TIGER.WANG	SCALE FREE	ALL DIMENSION UNIT IN MM			SHEET 1 OF 1	