


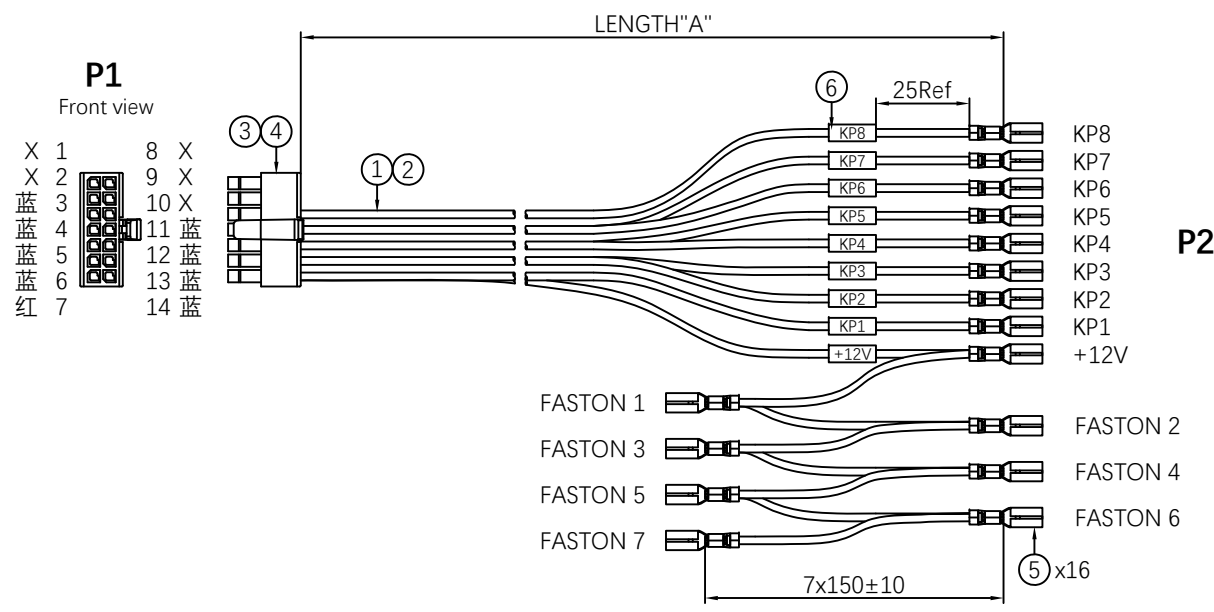

- NOTE:
1. Conductor resistance.: 5 Ohms Max.
 2. Insulation resistance.: 10M Ohms Min.
 3. Voltage.: DC 300V/0.01sec.
 4. 100% Test Open、Short & Miswire.
 5. 100% finished product inspection and size measurement.
 6. Terminal pulling force standard (reference value) UL486A.
 7. The assemble comply with IPC/WHMA-A-620E standard.

Pin Assignments			
P1	颜色 COLOR	P2 LABEL	LENGTH "A"
3	蓝 BLUE	KP8	500±10
4	蓝 BLUE	KP6	600±10
5	蓝 BLUE	KP4	500±10
6	蓝 BLUE	KP2	600±10
7	红 RED	+12V	500±20
	红 RED	-	150±10
	红 RED	-	150±10
	红 RED	-	150±10
	红 RED	-	150±10
	红 RED	-	150±10
	红 RED	-	150±10
11	蓝 BLUE	KP7	550±10
12	蓝 BLUE	KP5	500±10
13	蓝 BLUE	KP3	550±10
14	蓝 BLUE	KP1	500±10

7	-	PACKING	10PCS/PE BAG+LABEL	1
6	-	TUBE	DIGITAL WHITE SHRINK TUBE	9
5	-	TERMINAL	TE 140717-1 CONN QC RCPT 18-22AWG 0.110 NON-INSULATED (EQ)	16
4	-	HOUSING	TE 1-794617-4 CONN RCPT HSG 14POS 3.0mm	1
3	-	TERMINAL	TE 1-794610-2 CONN SOCKET 20-24AWG CRIMP GOLD	9
2	-	WIRE	UL1007 22AWG BLUE 80°C 300V	8
1	-	WIRE	UL1007 22AWG RED 80°C 300V	8
No.	PART NUMBER	NAME	DESCRIPTION	Q'TY

TITLE		EDOM ELECTRONICS CO.,LTD			
CUSTOMER	A002	CUSTOMER PART NO.	-		REV A
DRAWN BY	MAY.YU	PRODUCT PART NUMBER	A002-02041-01		
CHECKED BY	BILL.LEE	DRAWING NUMBER	A002-02041	SIZE A3	
APPROVED BY	TIGER.WANG	SCALE FREE	ALL DIMENSION UNIT IN MM	SHEET 1 OF 1	