


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.		

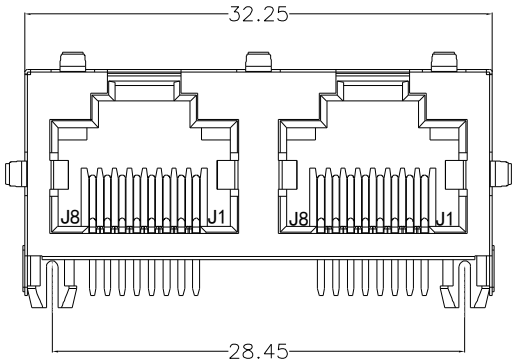


FRONT VIEW

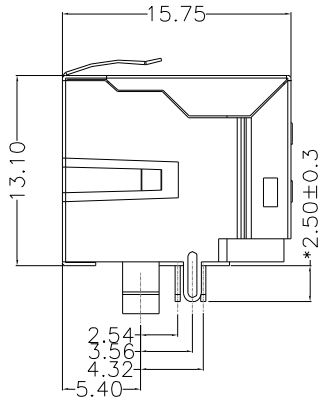

RIGHT SIDE VIEW

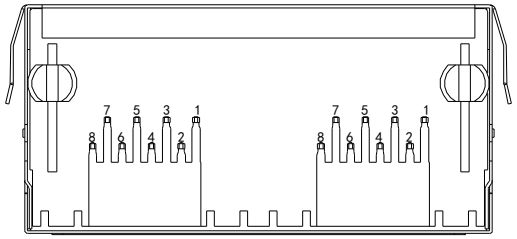


BOTTOM VIEW

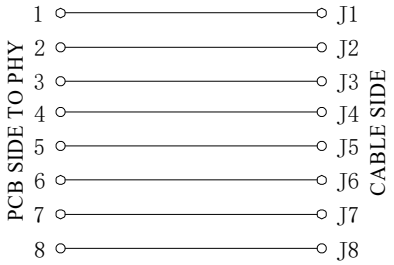

MATERIAL:
HOUSING: PBT,UL94V-0,BLACK.
TERMINAL: PHOSPHOR BRONZE T=0.35MM,
6U" GOLD PLATING ON CONTACT AREA.
SHIELD: C2680,T=0.20MM,20U" MIN NICKEL PLATING
ON ALL AREA.

MACHANICAL:
DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE.
INSERTION FORCE: 2.2KG.F MAX.
RETENTION STRENGTH : 7.7KG.F BETWEEN JACK AND PLUG.
OPERATING TEMPERATURE: -40℃～+85℃.
STORAGE TEMPERATURE: -40°C~+85°C.
ALL CRITICAL DIMENSIONS WITH "*"

ELECTRICAL:
VOLTAGE: 125 VOLTS AC.
CURRENT RATING : 1.5AMP.
DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ,1MIN.
INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL
AFTER 500V DC FOR 1 MINUTE.
CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX.
INITIAL 50 MILLIOHMS MAX. AFTER
DURABILITY TEST.

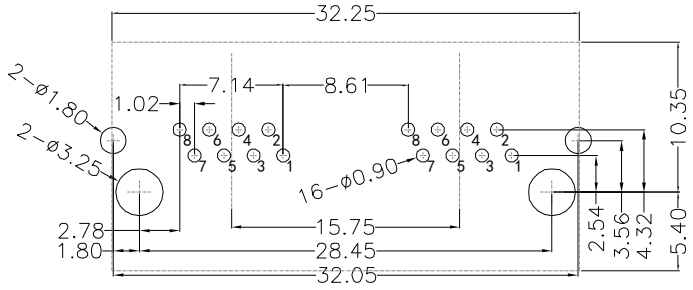

RECOMMENDED PCB LAYOUT
VIEWED FROM COMPONENT SIDE

EDOM ELECTRONICS
TEL: +86 0755 27801940
Mob: +86 15889397634
www.techedom.com

PART NO.	RJ45-2563157		DRAWN	MARK			
DWG NO.			CHECK	JOHN			
TOLERANCE	X.±0.35 .X±0.30		APPROVE	MELODY			
TITLE: RJ45 56 1*2 带屏蔽，无灯 6U	REV. A0	.XX±0.25 .XXX±0.10	SCALE	1:1	UNIT	mm	NO / DESCRIPTION