

REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.		

RoHS

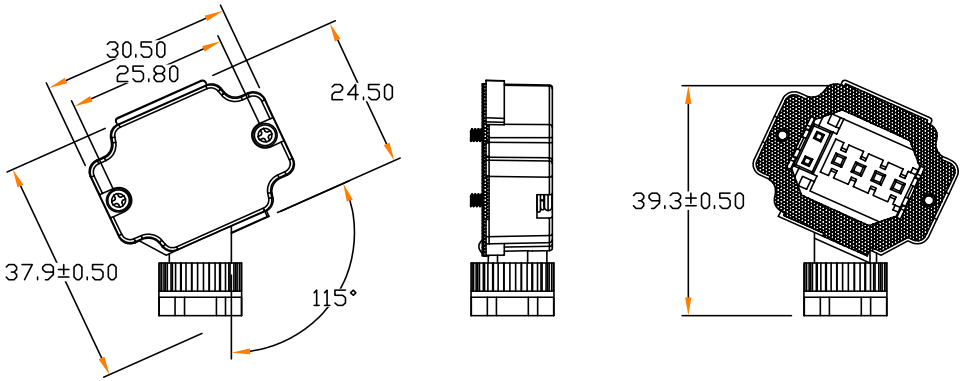

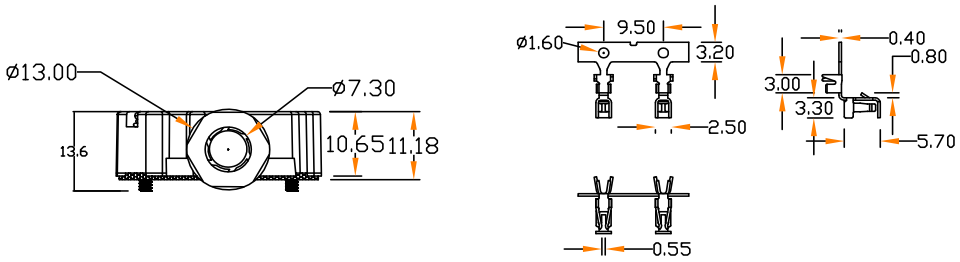

No.	Name	Qty	Remarks (Material)
1	Plastic Housing	1	PA66+30%GF UL94V-0 Black
2	Threaded Cover	1	PA66+30%GF UL94V-0 Black
3	Inner Core Body	1	PA66+30%GF UL94V-0 Black
4	Sealing Gasket	1	Rubber TPPA Black
5	Sealing Plug	1	Rubber TPPA Black
6	Brake Terminal	2	Phosphor Bronze C5191-H Gold Plated
7	Power Terminal	4	Phosphor Bronze C5191-H Gold Plated
8	Screw	2	SPCC M2*12 Black
9	Tail Claw	1	PA66+30%GF Black
10	Spring Clip	2	Stainless Steel SUS

Technical Specifications

Rated Current: Power: 7 A Max. / Brake: 5 A Max.


Rated Voltage: 200 VAC

Dielectric Withstanding Voltage: 1500 VAC


Insulation Resistance: 1000 MΩ Min. at 500 VDC

Operating Temperature: −20°C to +105°C

Protection Rating: IP67

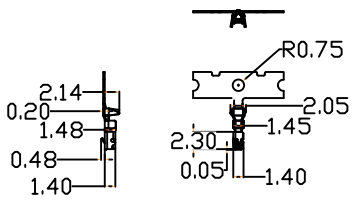

产品散件简示图

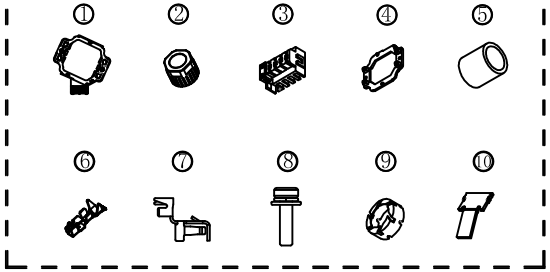

EDOM ELECTRONICS
TEL: +86 0755 27801940
Mob: +86 15889397634
www.techedom.com

PART NO.	ES6-4+2P			DRAWN	MARK		
DWG NO.				CHECK	JOHN		
TOLERANCE	X.±0.30 .X±0.25			APPROVE	MELODY		
TITLE: 4+2pin connector	REV. A0		.XX±0.15 .XXX±0.10	SCALE	1:1	UNIT mm	NO DESCRIPTION