

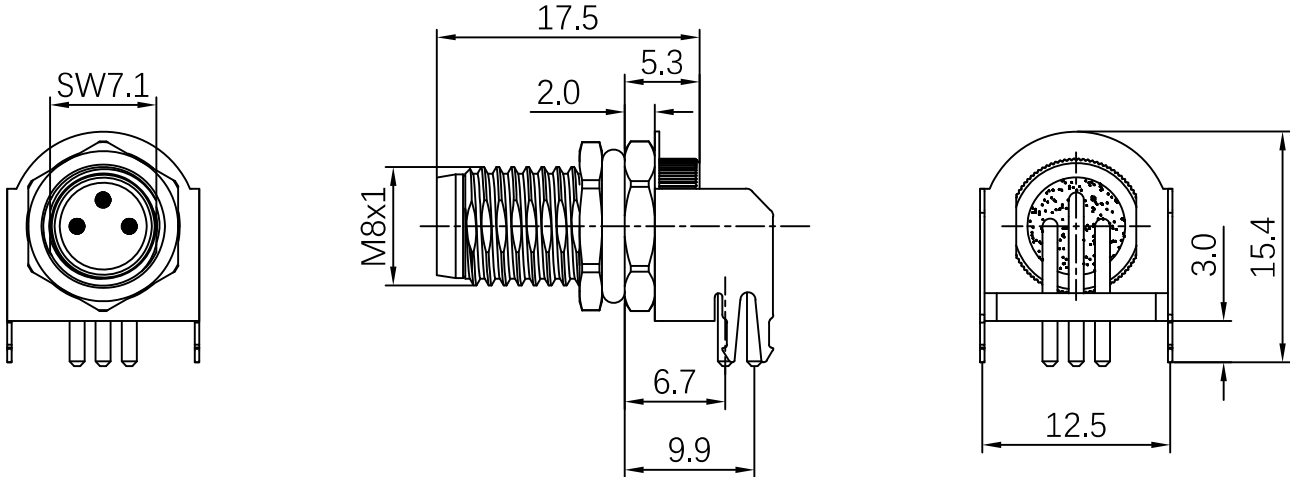


Table 1


Part No.	Coding & Pins	Plug Pin out	Contact Size(mm)	Rated Current	Rated Voltage
M08AP0339BK22	A Code 3 Pin		1.0	4A	60V/DC
M08AP0439BK22	A Code 4 Pin		1.0	4A	60V/DC
M08DP0439BK22	D Code 4 Pin		1.0	4A	60V/DC
M08BP0539BK22	B Code 5 Pin		1.0	3A	30V/DC
M08AP0639BK22	A Code 6 Pin		0.7	1.5A	30V/DC
M08AP0839BK22	A Code 8 Pin		0.6	1.5A	30V/DC

Material:

- Insulation: PA, Black
- Contact: Copper Alloy, Gold-Plated
- M8 Metal Thread: Copper Alloy, Nickel-Plated
- Nut: Copper Alloy, Nickel-Plated
- O-Ring: NBR, Black
- Epoxy Black

Technical Data:

- Standard: IEC61076-2-104
- Rated Voltage: [See Table 1](#)
- Rated Current: [See Table 1](#)
- Rated Temperature: -40°C~+80°C
- Durability: ≥500 Times Cycles
- Protection Degree: IP67 (Correct locking state)

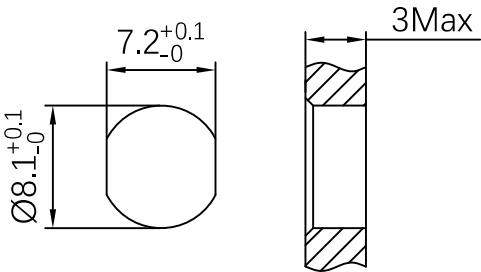

Recommend Panel CUT-OUT

UNMARKED TOLERANCES		TITLE M8 DEVICE CONNECTOR PLUG PANEL FRONT MOUNT MALE PCB SOLDER PINS ANGLE		EDOM ELECTRONICS CO., LTD.					
DIMENSIONS	TOLERANCE								
x.	±0.5	CUSTOMER	-	CUSTOMER PART NO.	-		SIZE A4	REV A	D
x.x	±0.25								
x.xx	±0.15								
0 to 500	+15 / -0	DRAWN BY	MAY.YU	PART NUMBER	M08XPXX39BK22		SIZE A4	REV A	D
> 501	+3%/-0 of length	CHECKED BY	KIMKEE	DRAWING NUMBER	M08XPXX39BK22				
ANGLES		APPROVED BY	TIGER.WANG	SCALE FREE	ALL DIMENSION UNIT IN MM	SHEET 1 OF 1			
x°	±1°								