
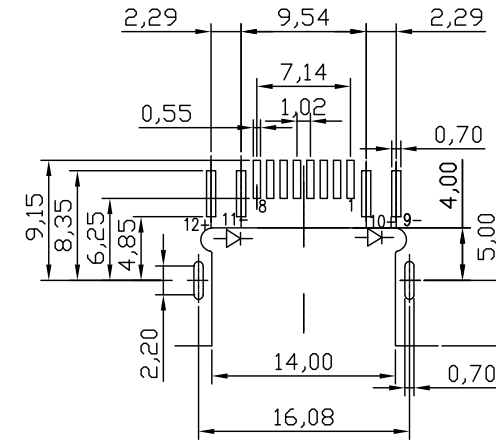



RoHS Compliant


REV.	DESCRIPTION	SIGN	DATE
A	NEW	Fred.Tong	17/06/26

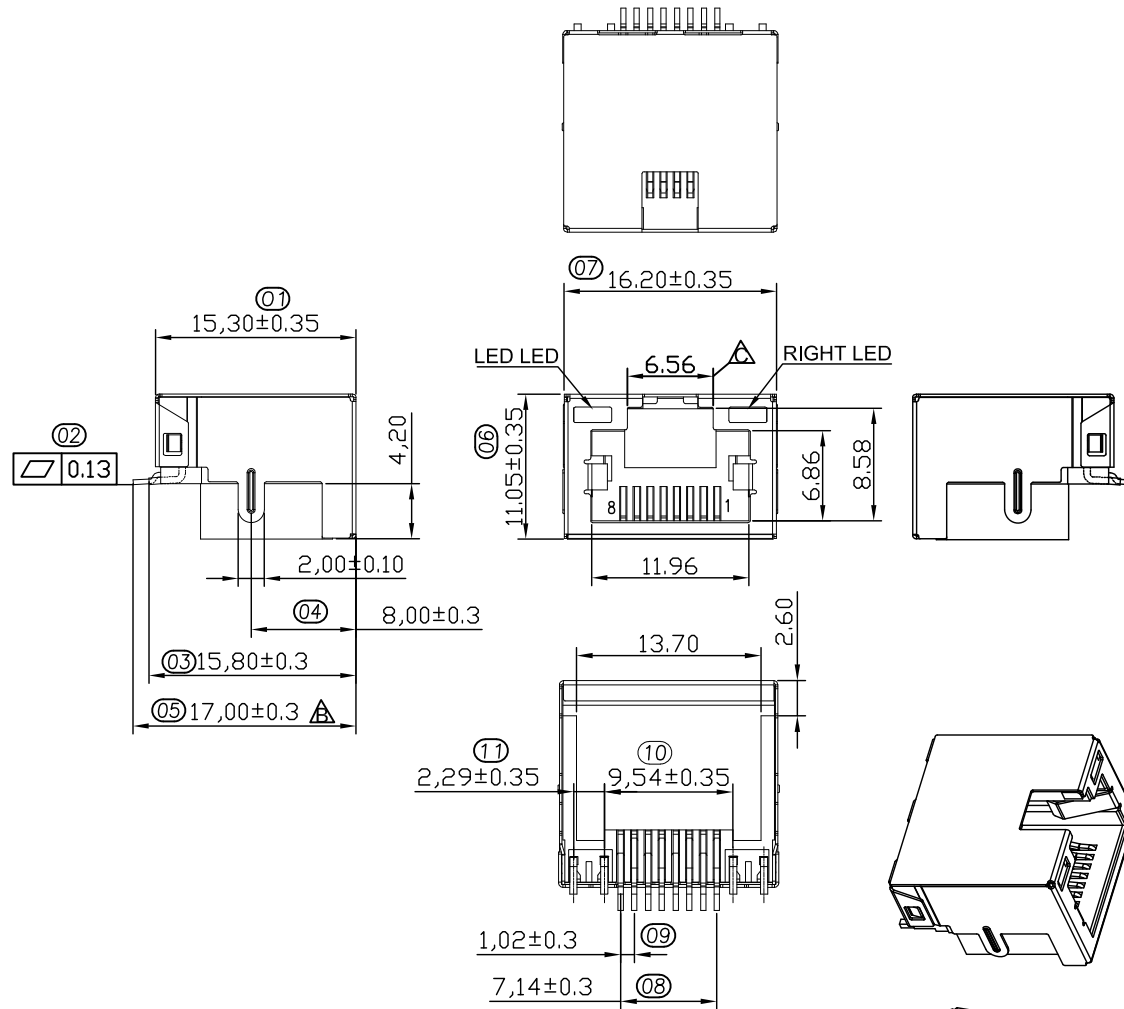

- NOTE:
- ELECTRICAL CHARACTERISTICS;
 - VOLTAGE RATING:125 VAC RMS
 - CURRENT TATING:1.5AMP
 - CONTACT RESISTANCE:30 MILLIOHMS MAX
 - INSULATION RESISTANCE:1000 MEGOHMS MIN
 - DIELECTRIC STRENGTH:1000V AC RMS 50Hz.1MIN
 - ENVIRONMENTAL:
 - TEMPERATURE RANGE:-40°C+85°C
 - RELATIVE HUMIDITYU:90-95%(40±2°C)
 - MATERIAL LIST:

4	LED	2		
3	SHELL	1	COPPER ALLOY	NI PLATED
2	CONTACT	8	PHOSPHOR BRONZE	AU/SN PLATED
1	HOUSING	1	THERMOPLASTIC	(UL 94V-0) BLACK
No.	PART NAME	QTY	MATERIAL	REMARK

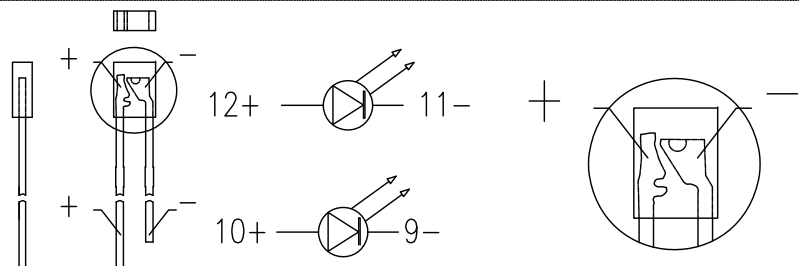

GENERAL TOLERANCES (UNLESS SPECIFIED)			DRAWN BY Alen.Yu		DATE 17/06/26		TITLE: RJ45 沉板4.2 SMT直脚带灯				
ITEM	MM	INCH	CHECKED BY	DATE							
3 PLACE	±0.15	±0.005	Liang.Li	17/06/26							
2 PLACE	±0.25	±0.01	APPROVED BY Fred.Tong	DATE 17/06/26	SIZE A4				PART NO. ERJ08FB1N1149		
1 PLACE	±0.35	±0.015									
0 PLACE	±0.50	±0.02									
ANGULAR ± 3°					SCALE		N/A		SHEET 1 OF 1		
METRIC		U. S.									
											
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO EDOM INCORPORATED AND SHOULD NOT BE USE WITHOUT WRITTEN PERMISSION										REV. A	