

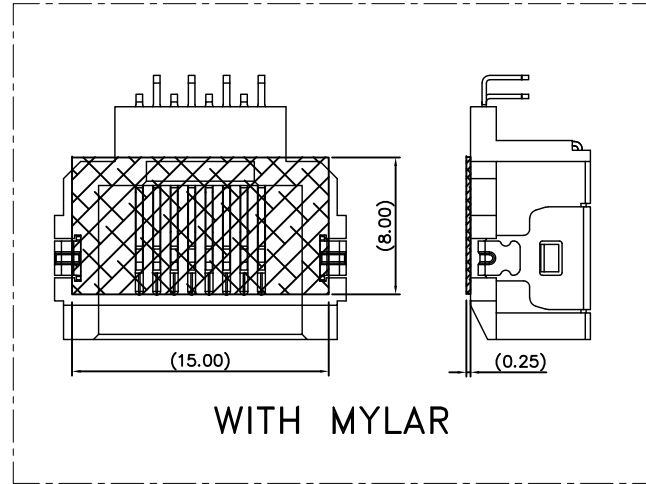


RoHS Compliant

REV.	DESCRIPTION	SIGN	DATE
A	NEW	Fred.Tong	20/09/09



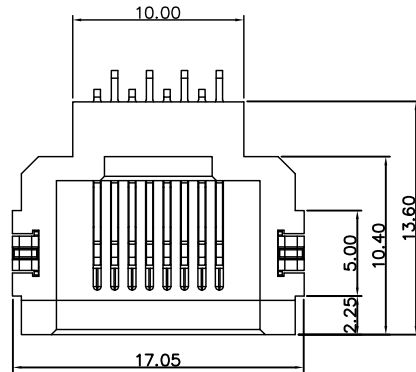


WITH MYLAR

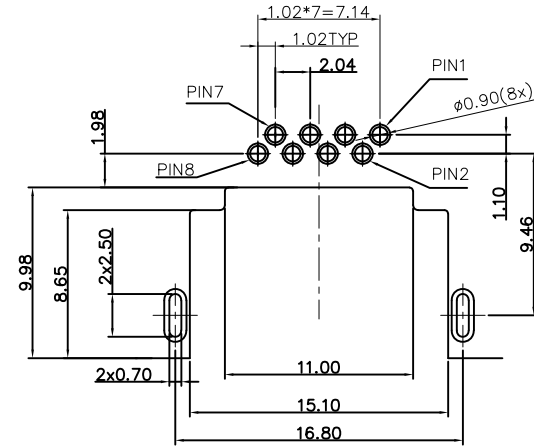

RECOMMENDED PCB LAYOUT

TOLERANCE ± 0.05

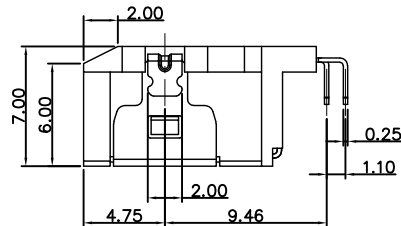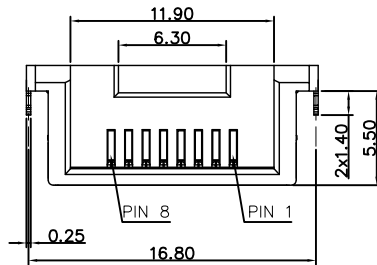

NOTE:

1.ELECTRICAL CHARACTERISTICS;

1.1 VOLTAGE RATING:125 VAC RMS

1.2 CURRENT TATING:1.5AMP

1.3 CONTACT RESISTANCE:30 MILLIOHMS MAX

1.4 INSULATION RESISTANCE:1000 MEGOHMS MIN

1.5 DIELECTRIC STRENGTH:1000V AC RMS 50Hz.1MIN



2 ENVIRONMENTAL:

2.1 TEMPERATURE RANGE:-40°C +85°C

2.2 RELATIVE HUMIDITYU:90 95%(40±2°C)

3.MATERIAL LIST:

3	SHELL	1	STAINLESS STEEL	NI 50U"PLATED
2	CONTACT	8	PHOSPHOR BRONZE	AU 1U"/SN PLATED
1	HOUSING	1	THERMOPLASTIC	(UL 94V-0)
No.	PART NAME	QTY	MATERIAL	REMARK

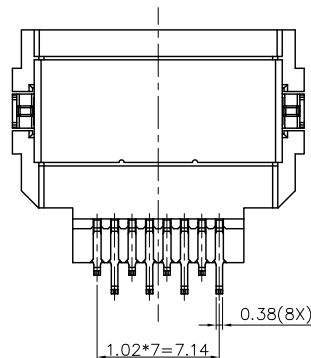

GENERAL TOLERANCES (UNLESS SPECIFIED)			DRAWN BY Alen.Yu	DATE 20/09/09	TITLE: RJ45 8P FEMALE 半波式 沉板H5.50 DIP	
ITEM	MM	INCH	CHECKED BY Fred.Tong	DATE 20/09/09		
3 PLACE	±0.15	±0.005	APPROVED BY	DATE		
2 PLACE	±0.25	±0.01	ANGLE OF PROJECTION 		SIZE A4	PART NO. ERJ08F5B3N1293SR
1 PLACE	±0.35	±0.015			SCALE N/A	SHEET 1 OF 1
0 PLACE	±0.50	±0.02	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO EDOM INCORPORATED AND SHOULD NOT BE USE WITHOUT WRITTEN PERMISSION			
				REV. A		