

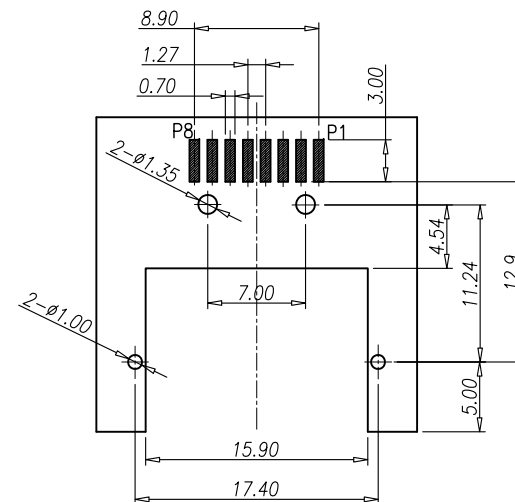
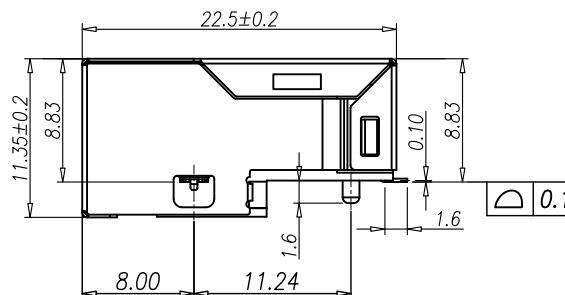
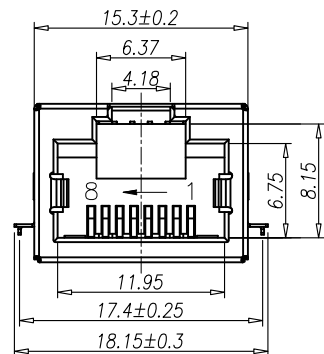


RoHS Compliant

REV.	DESCRIPTION	SIGN	DATE
A	NEW	QinYu	20/07/01



RECOMMENDED PCB LAYOUT (TOP VIEW)
ALL TOLERANCES ARE ± 0.05

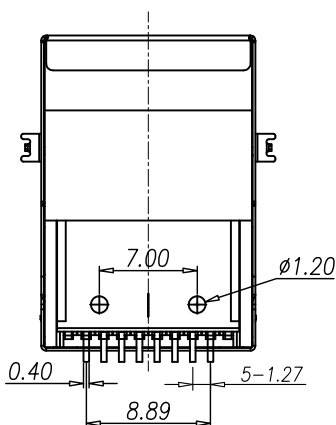


TOP VIEW

5	SHELL	1	BRASS	NI PALTING
4	SOLDER TERMINAL	8	BRASS	MATTE-TIN PALTING
3	CONTACT TETMIAL	8	PHOSPHOR BRONZE	G/F AU PALTING
2	COVER	1	LCP UL94V-0	BLACK&YELLOW
1	HOUSING	1	LCP UL94V-0	BLACK&YELLOW
NO	PART NAME	QTY	MATERIAL	PLATING&COLOR

SPECIFICATION

- 1.CURRENT RATING: 1.5AMPS
- 2.VOLTAGE RATING: 125V AC
- 3.INSULATION RESISTANCE: 500M Ω MIN.
- 4.WITHSTAND VOLTAGE:
AC1000V RMS 50Hz or 60Hz MIN.
- 5.CONTACT RESISTANCE:40m Ω MAX.
- 6.DURABILITY: 750 MATING CYCLES
- 7.OPERATING TEMPERATURE: -40°C~+80°C

P1	○	○	J1
P2	○	○	J2
P3	○	○	J3
P4	○	○	J4
P5	○	○	J5
P6	○	○	J6
P7	○	○	J7
P8	○	○	J8

GENERAL TOLERANCES (UNLESS SPECIFIED)			DRAWN BY QinYu		DATE 20/07/01		®	
ITEM	MM	INCH	CHECKED BY Roger		DATE 20/07/01			
3 PLACE	±0.15	±0.005	TITLE: RJ45 CONNECTOR 无灯无弹片 沉板式 H=8.83mm					
2 PLACE	±0.25	±0.01						
1 PLACE	±0.35	±0.015	APPROVED BY Fred.Tong		DATE 20/07/01			
0 PLACE	±0.50	±0.02	ANGLE OF PROJECTION				SIZE A4	PART NO. ERJ08FB1N1106
ANGULAR ± 2°								
METRIC		U.S.		SHEET 1 OF 1				
MM		INCHES						

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO EDOM
INCORPORATED AND SHOULD NOT BE USE WITHOUT WRITTEN PERMISSION

REV.
A