

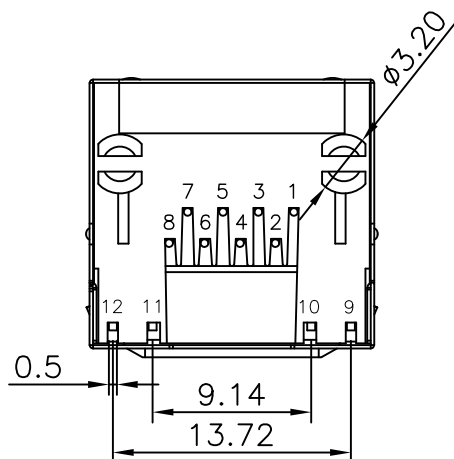
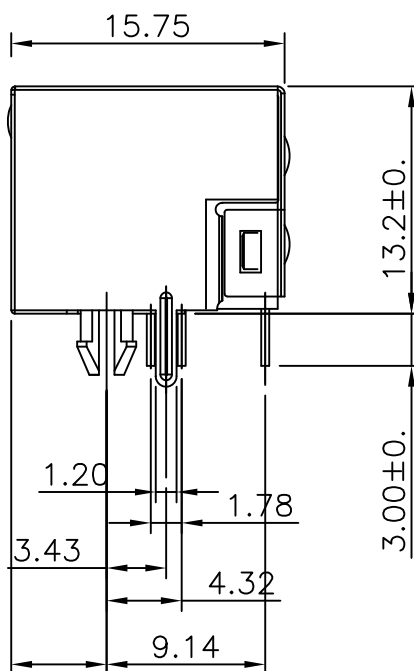


RoHS Compliant

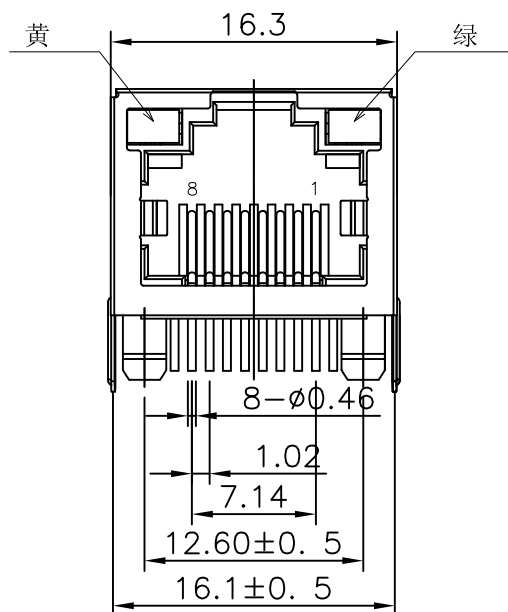

REV.	DESCRIPTION	SIGN	DATE
A	NEW	Fred.Tong	17/06/26

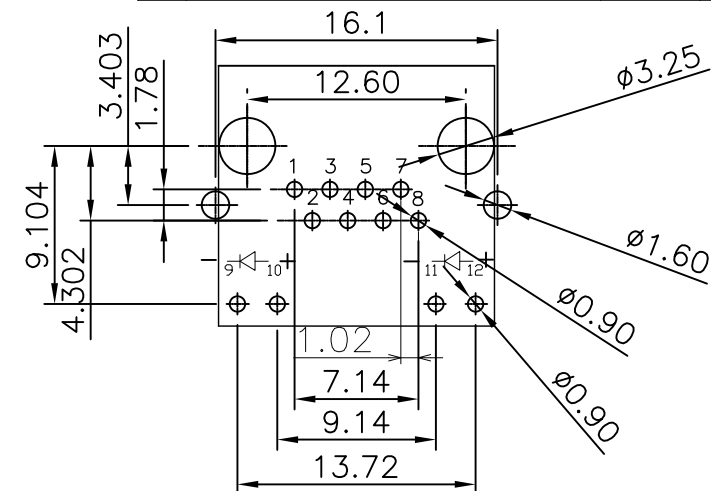


PCB LAYOUT(TOP VIEW)
RECOMMENDED

NOTE:

1. ELECTRICAL CHARACTERISTICS;
- 1.1 VOLTAGE RATING:125 VAC RMS
 - 1.2 CURRENT RATING:1.5AMP
 - 1.3 CONTACT RESISTANCE:30 MILLIOHMS MAX
 - 1.4 INSULATION RESISTANCE:1000 MEGOHMS MIN
 - 1.5 DIELECTRIC STRENGTH:1000V AC RMS 50Hz.1MIN
- 2 ENVIRONMENTAL:
- 2.1 TEMPERATURE RANGE:-40°C-+85°C
 - 2.2 RELATIVE HUMIDITY:90-95%(40±2°C)

- ### 3.MATERIAL LIST:

3	SHELL	1	COPPER ALLOY	NI PLATED
2	CONTACT	8	PHOSPHOR BRONZE	AU PLATED
1	HOUSING	1	THERMOPLASTIC	(UL 94V-0) BLACK
No.	PART NAME	QTY	MATERIAL	REMARK

GENERAL TOLERANCES (UNLESS SPECIFIED)			DRAWN BY Alen.Yu		DATE 17/06/26		®		
ITEM	MM	INCH	CHECKED BY	DATE		TITLE: RJ45 8P8C DIP L15.75 带灯左黄右绿			
3 PLACE	±0.15	±0.005	Liang.Li	17/06/26					
2 PLACE	±0.25	±0.01	APPROVED BY		DATE				
1 PLACE	±0.35	±0.015	Fred.Tong		17/06/26				
0 PLACE	±0.50	±0.02	ANGLE OF PROJECTION 			SIZE A4	PART NO. ERJ08FB1N1222		
ANGULAR ± 3°						SCALE	N/A	SHEET 1 OF 1	
METRIC		U.S.							
MM		INCHES	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO EDOM INCORPORATED AND SHOULD NOT BE USE WITHOUT WRITTEN PERMISSION						
							REV. A		