
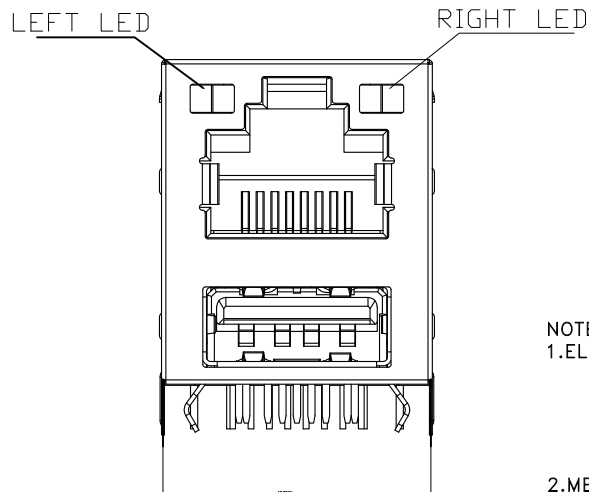


RoHS Compliant


REV.	DESCRIPTION	SIGN	DATE
A	NEW	RuoBiaoLing	2019/05/26

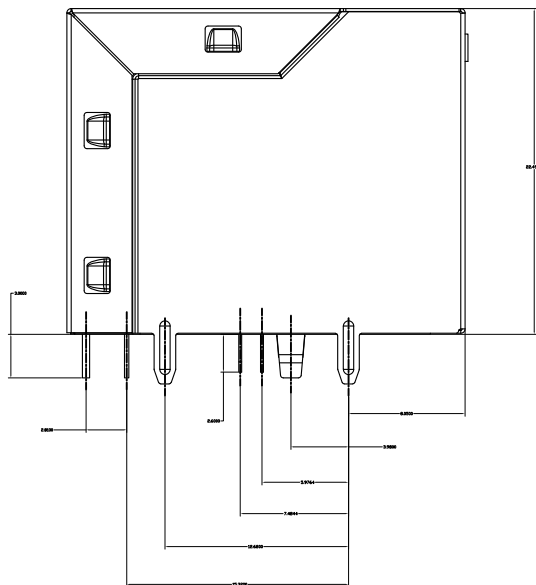


NOTES:
1.ELECTRONIC:
CONTACT CURRENT RATING: 1.5A
ATED VOLTAGE: 125V AC
CONTACT RESISTANCE: 30mohm Max
INSULATION RESISTANCE: 500 Megohms Min
WITHSTAND VOLTAGE: AC 500V,1Min.
2.MECHANICAL:
DURABILITY: 750 CYCLES
3.ENVIRONMENT CHARACTERISTICS:
OPERTING TEMPERATURE: -25°C TO +85°C


4.MATERIAL LIST:

No.	PART NAME	QTY	MATERIAL	REMARK
9	LED	2		
8	USB3.0 SHELL	1	COPPER ALLOY	NICKEL PLATED
7	CONTACT	1	PHOSPHOR BRONZE	AU/NICKEL PLATED
6	USB3.0 COVER		LCP BLUE	(UL94V-0)
5	USB3.0 HOUSING	1	LCP BLUE	(UL94V-0)
4	OUTER SHELL	1	COPPER ALLOY	NICKEL PLATED
3	RJ45 CONTACT	8	PHOSPHOR BRONZE	AU/NICKEL PLATED
2	RJ45 COVER	1	PBT BLACK	(UL94V-0)
1	RJ45 HOUSING	1	PBT BLACK	(UL94V-0)

GENERAL TOLERANCES (UNLESS SPECIFIED)			DRAWN BY RuoBiaoLing		DATE 2019/05/26		®				
ITEM	MM	INCH	CHECKED BY	DATE							
3 PLACE	±0.15	±0.005	/					TITLE: RJ45+单层USB3.0 带LED灯 左黄右绿			
2 PLACE	±0.25	±0.01									
1 PLACE	±0.35	±0.015									
0 PLACE	±0.50	±0.02									
ANGULAR ± 3°			ANGLE OF PROJECTION								
METRIC		U.S.				SIZE A4		PART NO. EADRJFNUSF1B018ST			
MM		INCHES				SCALE		N/A		SHEEL 1 OF 1	
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO EDOM INCORPORATED AND SHOULD NOT BE USE WITHOUT WRITTEN PERMISSION										REV. A	

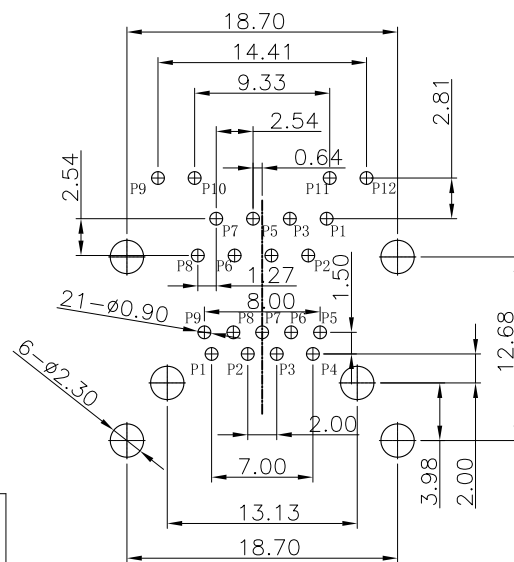

RECOMMENDED P.C.B LAYOUT
TOP VIEW (COMPONENT SIDE)

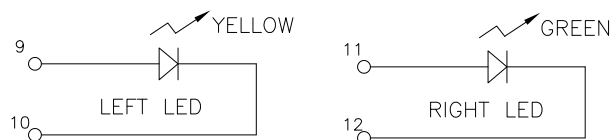

正极性