


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.		

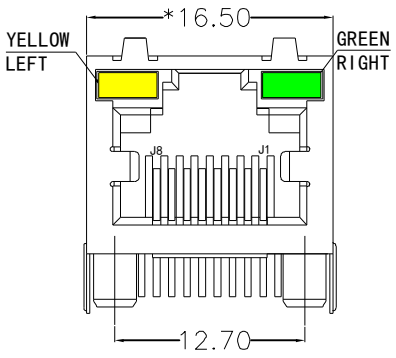


FRONT VIEW

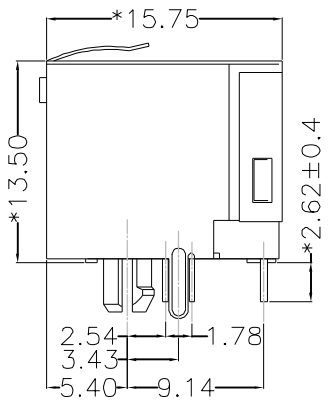

RIGHT SIDE VIEW



BOTTOM VIEW

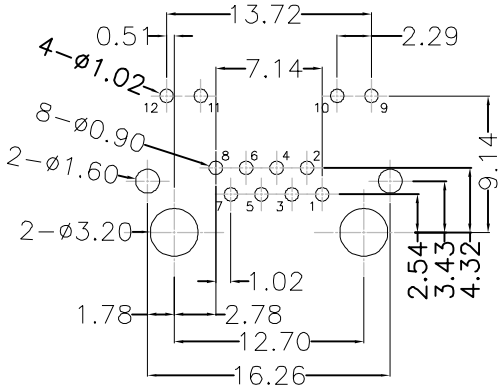

RECOMMENDED PCB LAYOUT
VIEWED FROM COMPONENT SIDE

MATERIAL:


HOUSING: PBT,UL94V-0,BLACK.
TERMINAL: PHOSPHOR BRONZE T=0.35MM,
50U″ GOLD PLATING ON CONTACT AREA.
SHIELD: C2680,T=0.20MM,20U" MIN NICKEL PLATING
ON ALL AREA.

MACHANICAL:

DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE.
INSERTION FORCE: 2.2KG.F MAX.
RETENTION STRENGTH : 7.7KG.F BETWEEN JACK AND PLUG.
OPERATING TEMPERATURE: -40℃～+85℃.
STORAGE TEMPERATURE: -40°C~+85°C.
ALL CRITICAL DIMENSIONS WITH "*"


ELECTRICAL:

VOLTAGE: 125 VOLTS AC.
CURRENT RATING : 1.5AMP.
DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ,1MIN.
INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL
AFTER 500V DC FOR 1 MINUTE.
CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX.
INITIAL 50 MILLIOHMS MAX. AFTER
DURABILITY TEST.

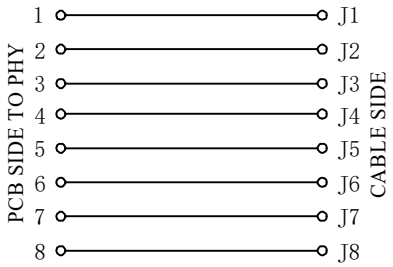

LED Specification

Standard LED Color	LED Wavelength	Foward(A)	Foward(V)
Green	568nm	20mA	1.85-2.45V
Yellow	585nm	20mA	1.7-2.2V

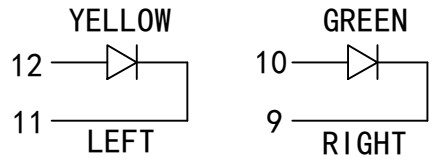

EDOM ELECTRONICS
TEL: +86 0755 27801940
Mob: +86 15889397634
www.techedom.com

PART NO.	RJ45-1852675			DRAWN	MARK		
DWG NO.				CHECK	JOHN		
TOLERANCE	X.±0.30 .X±0.25			APPROVE	MELODY		
TITLE: RJ45 8P8C 56 with leds and flange, Au50U	REV. A0	.XX±0.15 .XXX±0.10		SCALE	1:1	UNIT mm	NO / DESCRIPTION