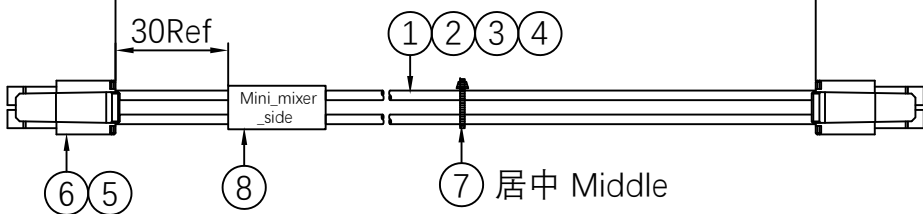


1		2		3		4		5		Customer drawing					
REV	ECN NO	DESCRIPTION			DATE	APPROVED		RoHS							
A	-	NEW RELEASED			2025.12.05	MAY.YU									
P1 Front view ORANGE 橙 1 GREEN 绿 2  3 黑 BLACK 4 黄 YELLOW 550±10 30Ref  Mini_mixer_side 7 居中 Middle P2 Front view ORANGE 橙 4 GREEN 绿 3  2 黑 BLACK 1 黄 YELLOW															
NOTE: 1. Conductor resistance.: 5 Ohms Max. 2. Insulation resistance.: 10M Ohms Min. 3. Voltage.: DC 300V/0.01sec. 4. 100% Test Open、Short & Miswire. 5. 100% finished product inspection and size measurement. 6. Terminal pulling force standard (reference value) UL486A. 7. The assemble comply with IPC/WHMA-A-620E standard. Pin Assignment P1 1 橙 ORANGE 2 绿 GREEN 3 黑 BLACK 4 黄 YELLOW P2 4 3 2 1															
9	-	PACKING	10PCS/PE BAG+LABEL			1		EDOM ELECTRONICS CO.,LTD							
8	-	TUBE	DIGITAL WHITE SHRINK TUBE			1									
7	-	CABLE TIE	CABLE TIE WHITE			1									
6	-	HOUSING	TE 794617-4 CONN RCPT HSG 4POS 3.0mm			2									
5	-	TERMINAL	1-794606-1 / 1-794610-2 CONN SOCKET 20-24AWG CRIMP GOLD			8									
4	-	WIRE	UL1007 24AWG YELLOW 80°C 300V			1		EDOM ELECTRONICS CO.,LTD							
3	-	WIRE	UL1007 24AWG GREEN 80°C 300V			1									
2	-	WIRE	UL1007 24AWG BLACK 80°C 300V			1									
1	-	WIRE	UL1007 24AWG ORANGE 80°C 300V			1									
No.	PART NUMBER	NAME	DESCRIPTION			Q'TY		EDOM ELECTRONICS CO.,LTD							
1		2		3		4									
								5		6					