


P1
Front view

BLUE 蓝 1 4 红 RED
X 2 5 X
RED 红 3 6 蓝 BLUE

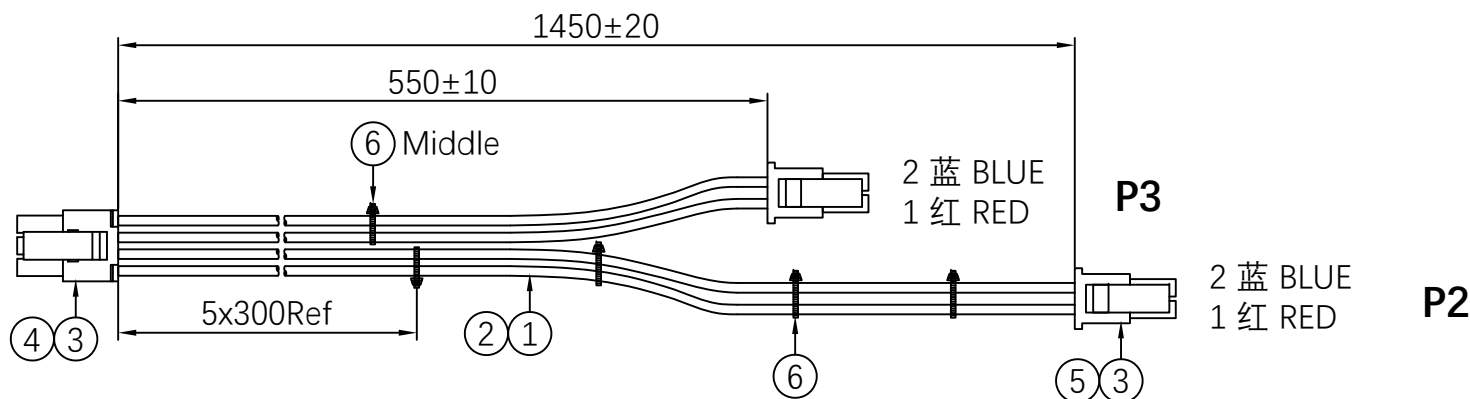

1. Conductor resistance.: 5 Ohms Max.
2. Insulation resistance.: 10M Ohms Min.
3. Voltage.: DC 300V/0.01sec.
4. 100% Test Open、Short & Miswire.
5. 100% finished product inspection and size measurement.
6. Terminal pulling force standard (reference value) UL486A.
7. The assemble comply with IPC/WHMA-A-620E standard.

P1	P2	P3
6	2 蓝 BLUE	
3	1 红 RED	
1		2 蓝 BLUE
4		1 红 RED

7	-	PACKING	10PCS/PE BAG+LABEL	1	TITLE LUM_CABEL OF PANEL		EDOM ELECTRONICS CO.,LTD				
6	-	CABLE TIE	CABLE TIE WHITE	5							
5	-	HOUSING	TE 1445022-2 CONN RCPT HSG 2POS 3.0mm	2							
4	-	HOUSING	TE 794617-6 CONN RCPT HSG 6POS 3.0mm	1							
3	-	TERMINAL	TE 1-794610-2 CONN SOCKET 20-24AWG CRIMP GOLD	8	CUSTOMER	A002	CUSTOMER PART NO.	-			
2	-	WIRE	UL1007 24AWG RED 80°C 300V	2	DRAWN BY	MAY.YU	PRODUCT PART NUMBER	A002-02039-01		SIZE	REV
1	-	WIRE	UL1007 24AWG BLUE 80°C 300V	2	CHECKED BY	BILL.LEE	DRAWING NUMBER	A002-02039		A4	A
No.	PART NUMBER	NAME	DESCRIPTION	Q'TY	APPROVED BY	TIGER.WANG	SCALE FREE	ALL DIMENSION UNIT IN MM		SHEET 1 OF 1	