

Customer drawing

RoHS


REV	ECN NO	DESCRIPTION	DATE	APPROVED
A	-	NEW RELEASED	2026.08.13	MAY.YU
B	-	UPDATE PIN ASSIGNMENT	2026.09.29	MAY.YU

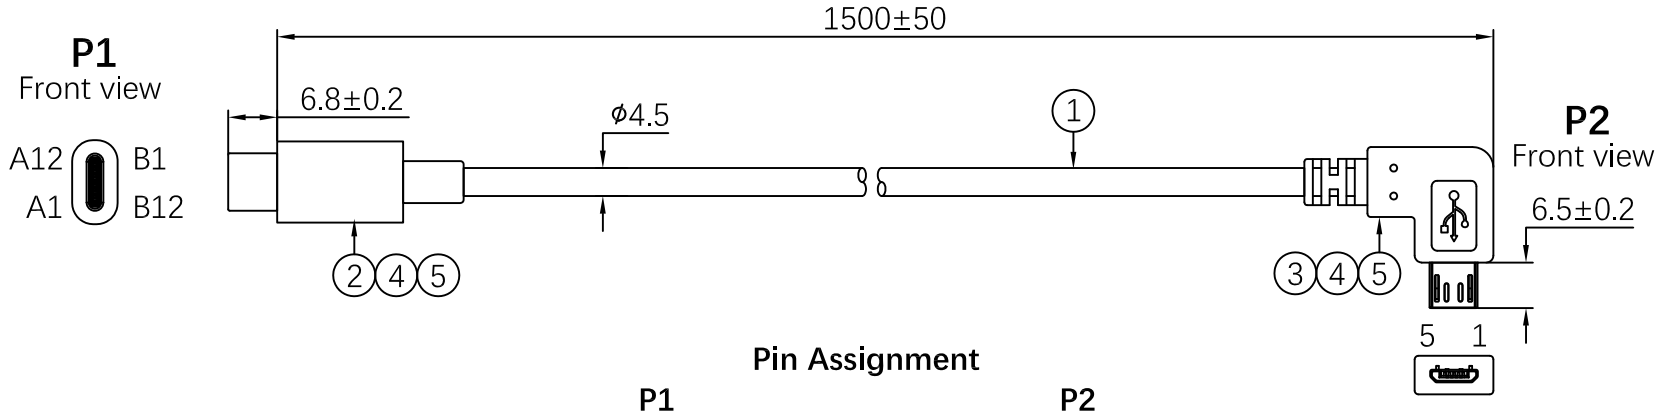

Pin Assignment

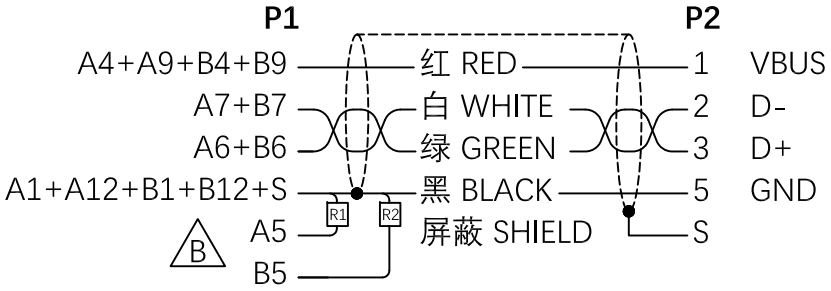

NOTE:
1. Conductor resistance.: 5 Ohms Max.
2. Insulation resistance.: 10M Ohms Min.
3. Voltage.: DC 300V/0.01sec.
4. 100% Test Open、Short & Miswire.
5. 100% finished product inspection and size measurement.

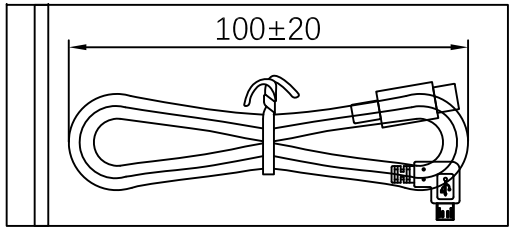

No.	PART NUMBER	NAME	DESCRIPTION	Q'TY
6	-	PACKING	1PCS/BAG	1
5	-	PVC	OVERMOLDING BLACK PVC 35P,STRAIN RELIEF	12g
4	-	PP	PP	5g
3	-	CONNECTOR	MICRO USB B TYPE 5PIN MALE	1
2	-	CONNECTOR	TYPE-C PLUG 16P USB2.0	1
1	-	CABLE	UL2725 28AWG*1PR+24AWG*2C+ADB OD4.5mm BLACK PVC	1

TITLE: TYPE-C MALE TO MICRO USB 5P ANGLE CABLE		EDOM ELECTRONICS CO.,LTD			
CUSTOMER	A002	CUSTOMER PART NO.	-		
DRAWN BY	MAY.YU	PRODUCT PART NUMBER	A002-00052-015	SIZE A4	REV B
CHECKED BY	BILL.LEE	DRAWING NUMBER	A002-00052		
APPROVED BY	TIGER.WANG	SCALE FREE	ALL DIMENSION UNIT IN MM	SHEET 1 OF 1	