
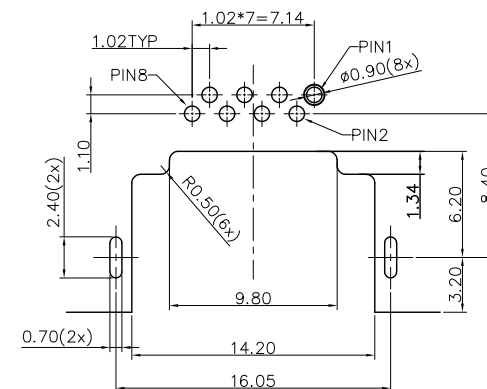
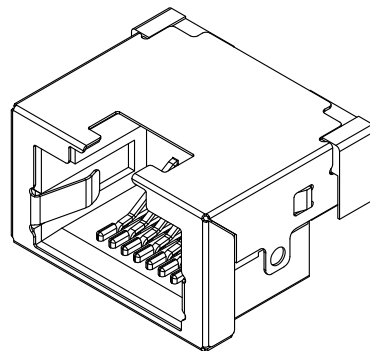


RoHS Compliant

REV.	DESCRIPTION	SIGN	DATE
A	NEW	Fred.Tong	19/07/08



RECOMMENDED PCB LAYOUT

TOLERANCE ± 0.05

NOTE:

1.ELECTRICAL CHARACTERISTICS;


- 1.1 VOLTAGE RATING:125 VAC RMS
- 1.2 CURRENT RATING:1.5AMP
- 1.3 CONTACT RESISTANCE:30 MILLIOHMS MAX
- 1.4 INSULATION RESISTANCE:1000 MEGOHMS MIN
- 1.5 DIELECTRIC STRENGTH:1000V AC RMS 50Hz.1MIN

2 ENVIRONMENTAL:

- 2.1 TEMPERATURE RANGE:-40°C +85°C
- 2.2 RELATIVE HUMIDITY:90 95%(40±2°C)

3.MATERIAL LIST:

3	SHELL	1	STAINLESS STEEL	NI PLATED
2	CONTACT	8	PHOSPHOR BRONZE	AU/SN PLATED
1	HOUSING	1	THERMOPLASTIC	(UL 94V-0)
No.	PART NAME	QTY	MATERIAL	REMARK

GENERAL TOLERANCES (UNLESS SPECIFIED)			DRAWN BY Alen.Yu		DATE 19/07/08				TEL: +86 0755 27801940 Mob: +86 15889397634 www.techedom.com						
ITEM	MM	INCH	CHECKED BY Fred.Tong		DATE 19/07/08		TITLE: RJ 45 8P FEMALE 沉板H5.15 DIP								
3 PLACE	±0.15	±0.005													
2 PLACE	±0.25	±0.01	APPROVED BY		DATE										
1 PLACE	±0.35	±0.015													
0 PLACE	±0.50	±0.02													
ANGULAR ± 3°					SIZE A4							PART NO. ERJ08FB3N1150			
METRIC		U.S.			SCALE							N/A		SHEEL 1 OF 1	
MM		INCHES													
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO EDOM INCORPORATED AND SHOULD NOT BE USE WITHOUT WRITTEN PERMISSION										REV. A					